

Led Lighting

INDOOR & OUTDOOR






 is trademark by DGSGRUP



Stratton

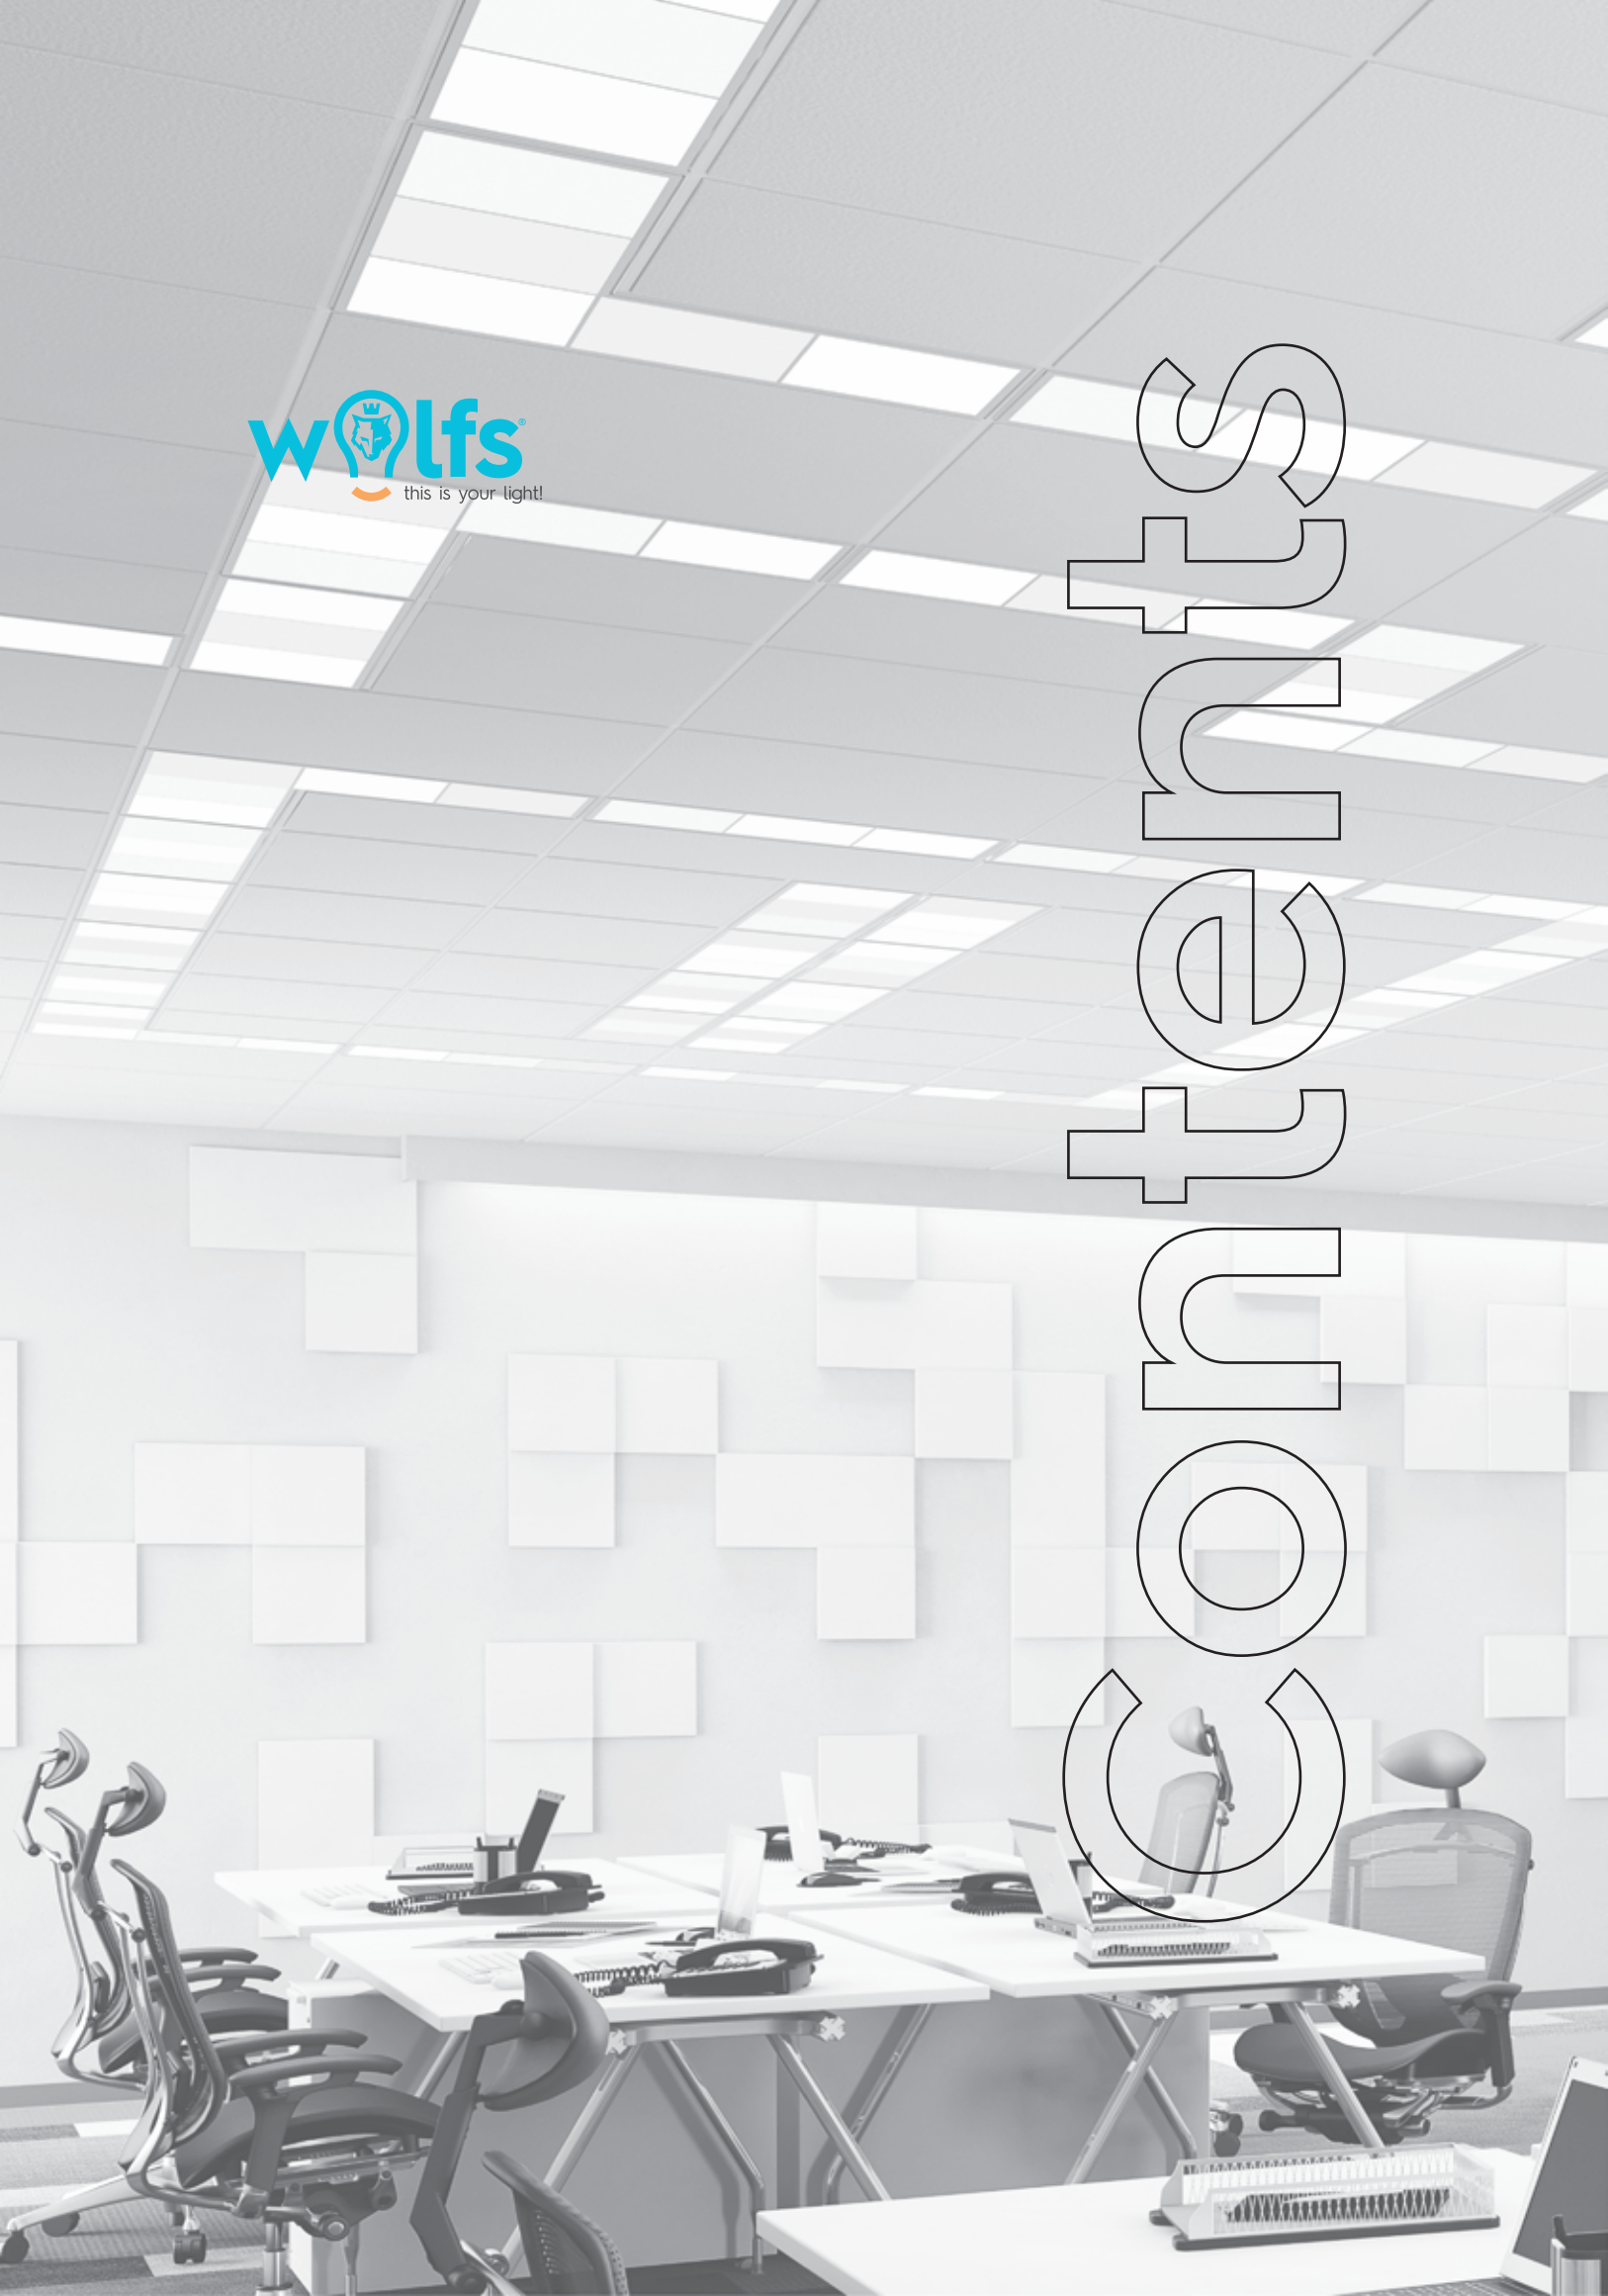

- 
- 6** LED FLOOD LIGHT
- 16** LED HIGH BAY
- 23** LED AREA & ROADWAY LIGHT
- 27** LED GAS STATION CANOPY RETROFIT KIT
- 32** LED GARAGE LIGHT
- 35** LED SPOT LIGHT
- 38** LED BULKHEAD LIGHT
- 44** LED CEILING LIGHT
- 66** LED PANEL LIGHT
- 72** LED DRAWER LIGHT
- 75** LED CABINET LIGHT
- 78** LED MIRROR LIGHT
- 81** LED GARDEN LIGHT
- 89** LED EMERGENCY LIGHT
- 91** LED TABLE LAMP
- 92** FILAMENT LIGHT BULB
- 98** LED FILAMENT LIGHT BULB
- 101** LED BULB
- 108** POULTRY LED TUBE



7



8



9



10



11




12



13



14



15



17




18




19



20



21



22



24



25



26



28




29



30



31



33



34



36



37



39



40



41



42



43



45



46



47



48



49



50



52



53

54



55



56



LED FLOOD LIGHT




Professional LED
lighting supplier

Project & DIY

Led Flood light



Connection Box

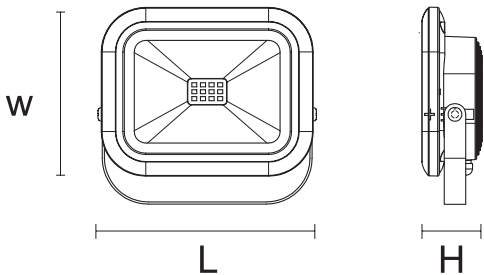

IP65 CORROSION PROOF

IK08 ANTI-IMPACT



Housing
10W - Plastic;
20W/30W/50W - Aluminum die-casting

3000 K 4000 K 6500 K

Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-IPAD FL1-10	AC100-277V	>0.9	10W	1010lm	120°	152*139*42mm
LED-IPAD FL1-20	AC100-277V	>0.9	20W	2025lm	120°	152*139*42mm
LED-IPAD FL1-30	AC100-277V	>0.9	30W	3030lm	120°	174*156*54mm
LED-IPAD FL1-50	AC100-277V	>0.9	50W	5035lm	120°	225*208*54mm
LED-IPAD FL2-10	AC100-277V	>0.9	10W	1010lm	120°	152*139*74mm
LED-IPAD FL2-20	AC100-277V	>0.9	20W	2025lm	120°	152*139*74mm
LED-IPAD FL2-30	AC100-277V	>0.9	30W	3030lm	120°	174*156*82mm
LED-IPAD FL2-50	AC100-277V	>0.9	50W	5035lm	120°	225*208*80mm

* FL2: with connection box

Led Flood light

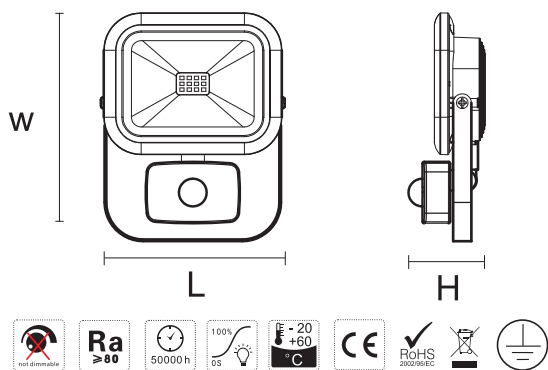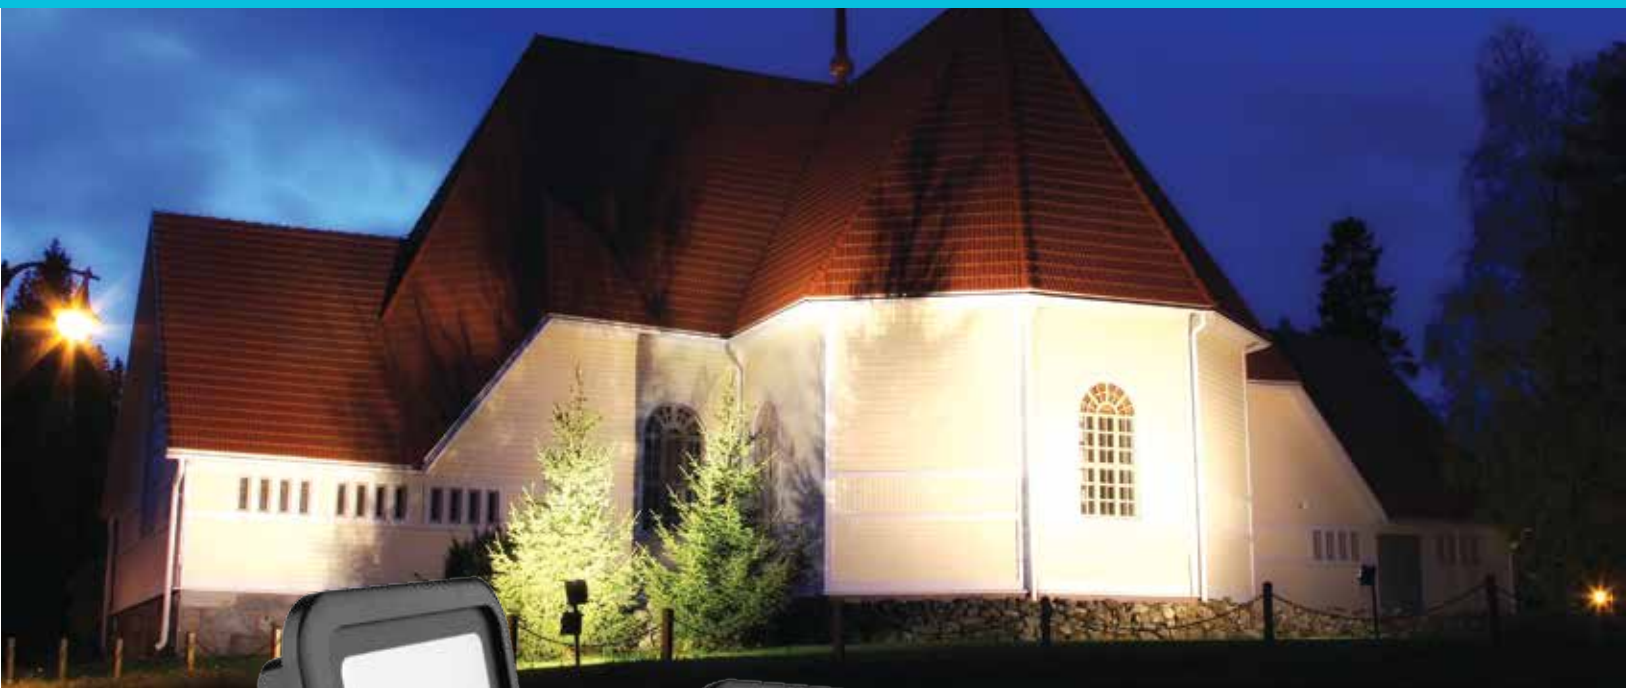

Connection Box



IP65 CORROSION PROOF

IK08 ANTI-IMPACT



Housing
10W - Plastic;
20W/30W/50W - Aluminum die-casting



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-IPAD FL1-10-PIR	AC100-277V	>0.9	10W	1010lm	120°	152*185*65mm
LED-IPAD FL1-20-PIR	AC100-277V	>0.9	20W	2025lm	120°	152*185*65mm
LED-IPAD FL1-30-PIR	AC100-277V	>0.9	30W	3030lm	120°	174*207*69mm
LED-IPAD FL1-50-PIR	AC100-277V	>0.9	50W	5035lm	120°	225*261*66mm
LED-IPAD FL2-10-PIR	AC100-277V	>0.9	10W	1010lm	120°	152*185*95mm
LED-IPAD FL2-20-PIR	AC100-277V	>0.9	20W	2025lm	120°	152*185*95mm
LED-IPAD FL2-30-PIR	AC100-277V	>0.9	30W	3030lm	120°	174*207*94mm
LED-IPAD FL2-50-PIR	AC100-277V	>0.9	50W	5035lm	120°	225*261*94mm

* FL2: with connection box

Led Flood light

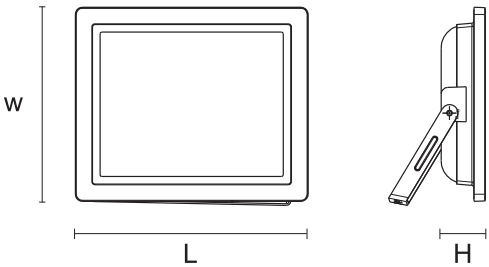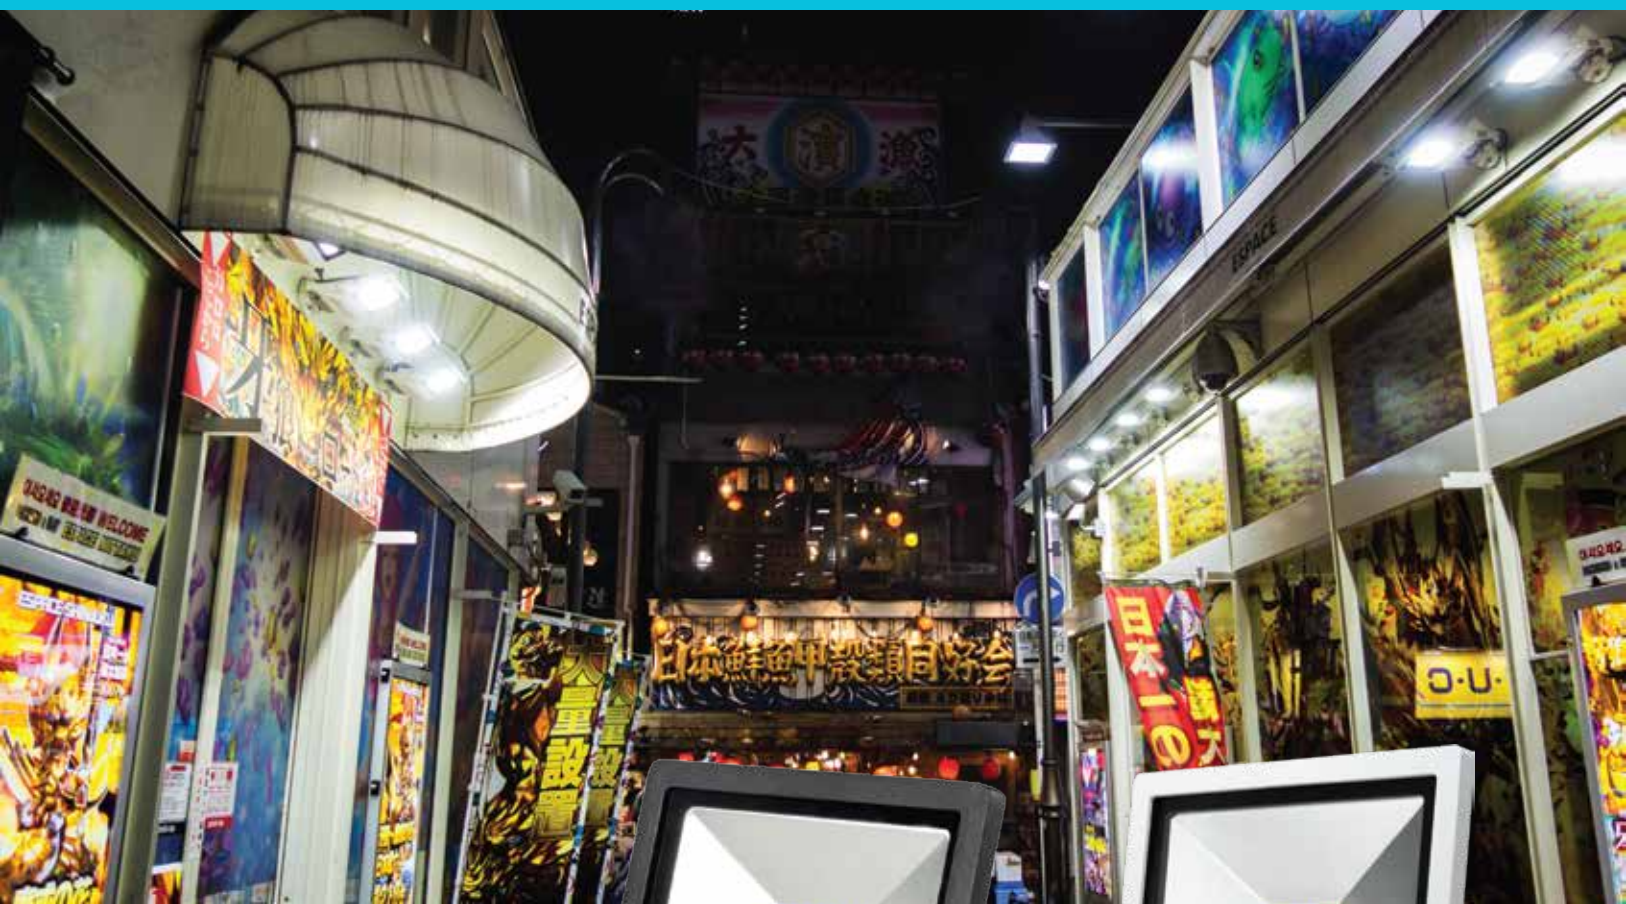

IP65 CORROSION PROOF



IK08 ANTI-IMPACT

Economic Collection




Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-EC-FL-10	AC100-277V	>0.9	10W	1015lm	120°	90*75*35mm
LED-EC-FL-20	AC100-277V	>0.9	20W	2045lm	120°	135*115*35mm
LED-EC-FL-30	AC100-277V	>0.9	30W	3025lm	120°	185*155*45mm
LED-EC-FL-50	AC100-277V	>0.9	50W	5050lm	120°	240*210*50mm
LED-EC-FL-70	AC100-277V	>0.9	70W	7035lm	120°	278*231*57mm
LED-EC-FL-100	AC100-277V	>0.9	100W	10100lm	120°	313*261*57mm

Led Flood light

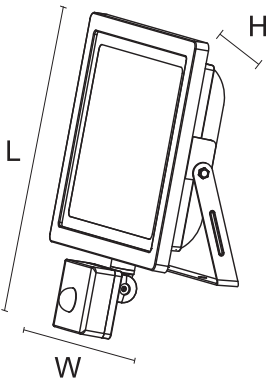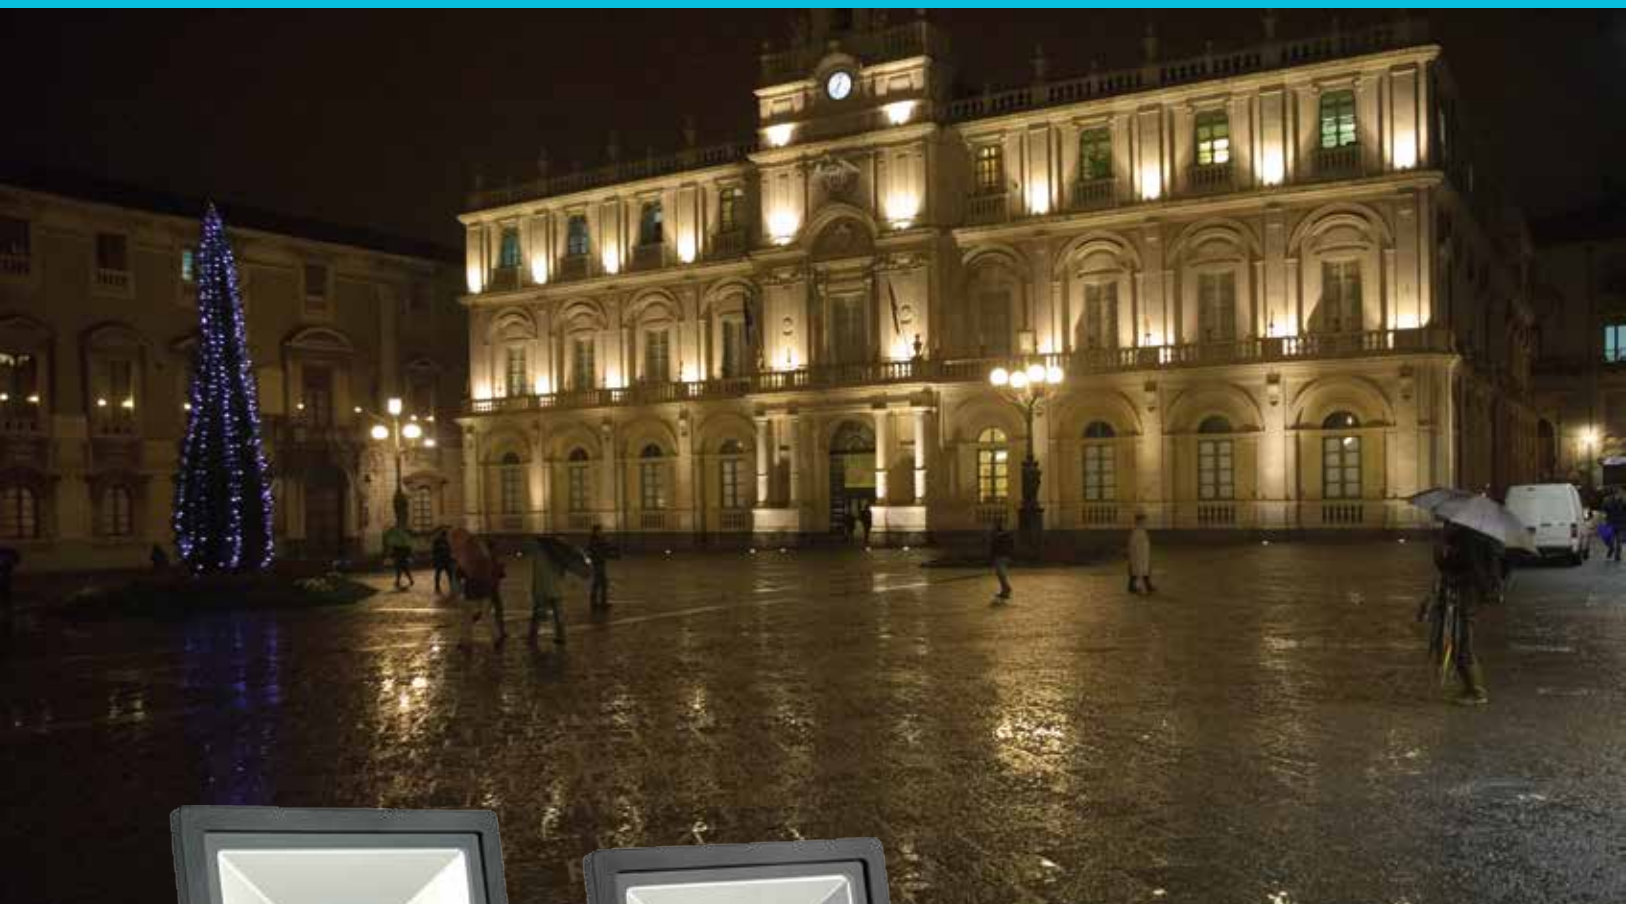

IP65 CORROSION PROOF		IK08 ANTI-IMPACT		Economic Collection PIR Sensor		3000 K 4000 K 6500 K	
Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)	
LED-EC-FL-10-PIR	AC100-277V	>0.9	10W	1010lm	120°	121*89*65mm	
LED-EC-FL-20-PIR	AC100-277V	>0.9	20W	2025lm	120°	158*137*65mm	
LED-EC-FL-30-PIR	AC100-277V	>0.9	30W	3035lm	120°	198*186*70mm	
LED-EC-FL-50-PIR	AC100-277V	>0.9	50W	5045lm	120°	247*242*70mm	


Led Flood light

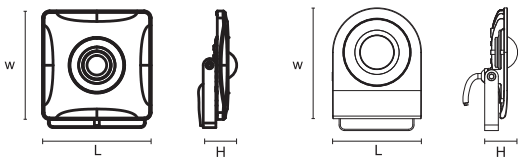

IP65 CORROSION PROOF		IK08 ANTI-IMPACT	Die-casting Aluminum Housing	3000 K 4000 K 6500 K		
-----------------------------	--	-------------------------	------------------------------	---	--	--

Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-COB-FL-10-S	AC100-277V	>0.9	10W	1010lm	120°	155*167*48mm
LED-COB-FL-30-S	AC100-277V	>0.9	30W	2025lm	120°	215*197*54mm
LED-COB-FL-50-S	AC100-277V	>0.9	50W	3030lm	120°	240*221*58mm
LED-COB-FL-10-Q	AC100-277V	>0.9	10W	1010lm	120°	105*145*30mm
LED-COB-FL-30-Q	AC100-277V	>0.9	30W	3025lm	120°	166*217*49mm
LED-COB-FL-50-Q	AC100-277V	>0.9	50W	5045lm	120°	190*251*52mm

Led Flood light

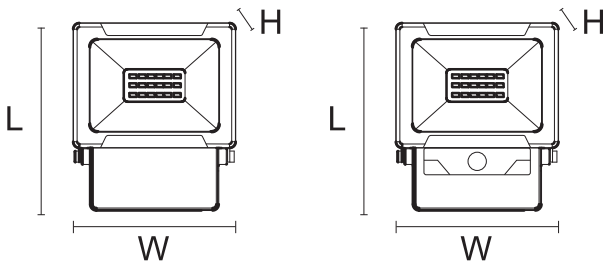


Connection Box



IP65 CORROSION PROOF		IK08 ANTI-IMPACT		Die-casting Aluminum Housing With connection box at back side		3000 K 4000 K 6500 K	
Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)	
LED-FL-K1S10A1	AC100-277V	>0.9	10W	1010lm	120°	135*55*135mm	
LED-FL-K1S20A1	AC100-277V	>0.9	20W	2025lm	120°	158*55*166mm	
LED-FL-K1S30A1	AC100-277V	>0.9	30W	3030lm	120°	196*61*207mm	
LED-FL-K1S50A1	AC100-277V	>0.9	50W	5035lm	120°	235*61*245mm	
LED-FL-K1S10A1-B6	AC100-277V	>0.9	10W	1010lm	120°	135*56*150mm	
LED-FL-K1S20A1-B6	AC100-277V	>0.9	20W	2025lm	120°	158*56*166mm	
LED-FL-K1S30A1-B6	AC100-277V	>0.9	30W	3030lm	120°	196*61*207mm	
LED-FL-K1S50A1-B6	AC100-277V	>0.9	50W	5035lm	120°	235*61*245mm	


Led Flood light

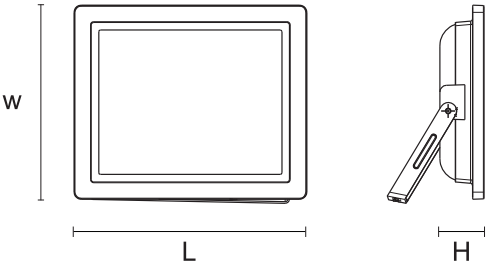

IP65 CORROSION PROOF


IK08 ANTI-IMPACT

Super slim design, only 35mm



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-FL-BLS10A1	AC100-277V	>0.9	10W	1015lm	120°	115*106*35mm
LED-FL-BLS20A1	AC100-277V	>0.9	20W	2025lm	120°	150*127*35mm
LED-FL-BLS30A1	AC100-277V	>0.9	30W	3035lm	120°	185*175*35mm
LED-FL-BLS50A1	AC100-277V	>0.9	50W	5045lm	120°	210*185*38mm

Led Flood light

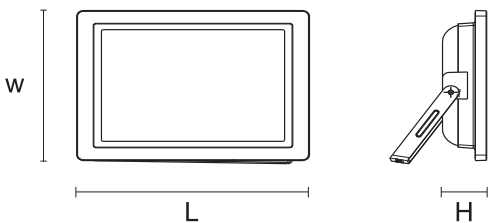

IP65 CORROSION PROOF

IK08 ANTI-IMPACT

Super slim design, only 35mm



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-SLIM iPad FL-10	AC100-277V	>0.9	10W	1015lm	120°	110*95*21mm
LED-SLIM iPad FL-20	AC100-277V	>0.9	20W	2025lm	120°	140*115*24mm
LED-SLIM iPad FL-30	AC100-277V	>0.9	30W	3015lm	120°	190*150*24mm
LED-SLIM iPad FL-50	AC100-277V	>0.9	50W	5045lm	120°	220*116*32mm

Led Flood light / High Bay / Tunnel



300W



450W



100W



150W



200W



IP65 WATER PROOF

4500 K 5500 K

Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-FL-EL-100W	AC 100~277 V	>0.9	100W	12000lm	90°-110°-150°	330*365*224 mm
LED-FL-EL-150W	AC 100~277 V	>0.9	150W	18000lm	90°-110°-150°	435*365*224 mm
LED-FL-EL-200W	AC 100~277 V	>0.9	200W	24000lm	90°-110°-150°	540*365*224 mm
LED-FL-EL-300W	AC 100~277 V	>0.9	300W	36000lm	90°-110°-150°	750*365*224 mm
LED-FL-EL-450W	AC 100~277 V	>0.9	450W	54000lm	90°-110°-150°	1065*365*224 mm





LED HIGH BAY



Professional LED
lighting supplier

Project & Professional

Led High Bay

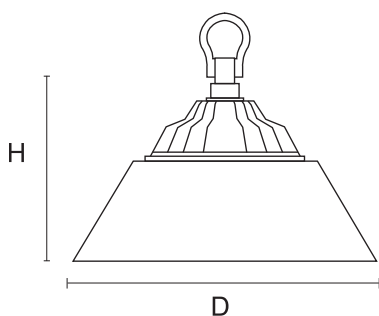


IP20

CORROSION
PROOF

IK10

ANTI-IMPACT

Die-casting Aluminum Housing



Item NO.	Input	PF	Wattage	Lumen	Dimension(D*H)
LED-HIGH BAY-30W	AC100-277V	>0.9	30W	3045lm	240*160mm
LED-HIGH BAY-50W	AC100-277V	>0.9	50W	5050lm	320*210mm
LED-HIGH BAY-80W	AC100-277V	>0.9	80W	8085lm	400*260mm

Led High Bay / Tunnel / Floodlight



200W



300W



450W



50W



90W



120W



150W



IP65

CORROSION
PROOF

4500 K

5500 K



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-HIGH-BAY-R-50W	AC 100~277 V	>0.9	50W	5100lm	90°-120°	235*200*223 mm
LED-HIGH-BAY-R-90W	AC 100~277 V	>0.9	90W	9180lm	90°-120°	410*410*260 mm
LED-HIGH-BAY-R-120W	AC 100~277 V	>0.9	120W	12240lm	90°-120°	410*410*260 mm
LED-HIGH-BAY-R-150W	AC 100~277 V	>0.9	150W	15750lm	90°-120°	484*410*360 mm
LED-HIGH-BAY-R-200W	AC 100~277 V	>0.9	200W	21000lm	90°-120°	484*410*360 mm
LED-HIGH-BAY-R-300W	AC 100~277 V	>0.9	300W	31500lm	90°-120°	636*385*422 mm
LED-HIGH-BAY-R-450W	AC 100~277 V	>0.9	450W	47250lm	90°-120°	636*565*422 mm

Led High Bay



100W



160W



240W



IP65

CORROSION
PROOF

IP30

DUSTER
PROOF

4500 K

5500 K



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-HIGH-BAY-L-100W	AC 100~277 V	>0.9	100W	16500lm	60°	310*310*375 mm
LED-HIGH-BAY-L-160W	AC 100~277 V	>0.9	160W	38400lm	60°-90°	410*410*485 mm
LED-HIGH-BAY-L-240W	AC 100~277 V	>0.9	240W	96000lm	60°-90°	410*410*482 mm

Led High Bay



100W



150W



200W



IP67 WATER PROOF

IP65 CORROSION PROOF



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-HIGH-BAY-U-100W	AC 100~277 V	>0.9	100W	10000lm	120°	366*366*300 mm
LED-HIGH-BAY-U-150W	AC 100~277 V	>0.9	150W	15000lm	120°	460*460*342 mm
LED-HIGH-BAY-U-200W	AC 100~277 V	>0.9	200W	20000lm	120°	460*460*342 mm


Led High Bay




100W




150W



200W



300W



IP65

CORROSION
PROOF

4500 K

5500 K



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-HIGH-BAY-T-100W	AC 100~277 V	>0.9	100W	10000lm	90°-110°-150°	650*159*114 mm
LED-HIGH-BAY-T-150W	AC 100~277 V	>0.9	150W	15000lm	90°-110°-150°	945*159*114 mm
LED-HIGH-BAY-T-200W	AC 100~277 V	>0.9	200W	20000lm	90°-110°-150°	1240*159*114 mm
LED-HIGH-BAY-T-300W	AC 100~277 V	>0.9	300W	30000lm	90°-110°-150°	1830*159*114 mm

Led High Bay



100W



150W



200W



300W



450W



IP66 WATER PROOF



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-HIGH-BAY-Z-100W	AC 100~277 V	>0.9	100W	12000lm	90°-110°-150°	330*365*224 mm
LED-HIGH-BAY-Z-150W	AC 100~277 V	>0.9	150W	18000lm	90°-110°-150°	435*365*224 mm
LED-HIGH-BAY-Z-200W	AC 100~277 V	>0.9	200W	24000lm	90°-110°-150°	540*365*224 mm
LED-HIGH-BAY-Z-300W	AC 100~277 V	>0.9	300W	36000lm	90°-110°-150°	720*365*224 mm
LED-HIGH-BAY-Z-450W	AC 100~277 V	>0.9	450W	54000lm	90°-110°-150°	1065*365*224 mm

LED AREA & ROADWAY LIGHT



Professional LED
lighting supplier

Open Road

Led Area Light



100W



150W



200W



300W



IP65 CORROSION PROOF

4500 K 5500 K

Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-HIGH-RO-D-100W	AC 100~277 V	>0.9	100W	10500lm	90°-120°	385*40*260 mm
LED-HIGH-RO-D-150W	AC 100~277 V	>0.9	150W	15750lm	90°-120°	400*560*260 mm
LED-HIGH-RO-D-200W	AC 100~277 V	>0.9	200W	21000lm	90°-120°	400*560*260 mm
LED-HIGH-RO-D-300W	AC 100~277 V	>0.9	300W	31500lm	90°-120°	605*600*295 mm

Led Area Light



100W



150W



200W



300W



450W




IP66 WATER PROOF

4500 K 5500 K

Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-HIGH-RO-P-100W	AC 100~277 V	>0.9	100W	12000lm	90°-110°-150°	330*365*224 mm
LED-HIGH-RO-P-150W	AC 100~277 V	>0.9	150W	18000lm	90°-110°-150°	435*365*224 mm
LED-HIGH-RO-P-200W	AC 100~277 V	>0.9	200W	24000lm	90°-110°-150°	540*365*224 mm
LED-HIGH-RO-P-300W	AC 100~277 V	>0.9	300W	36000lm	90°-110°-150°	750*365*224 mm
LED-HIGH-RO-P-450W	AC 100~277 V	>0.9	450W	54000lm	90°-110°-150°	1065*365*224 mm

Led Area & Roadway Lighting

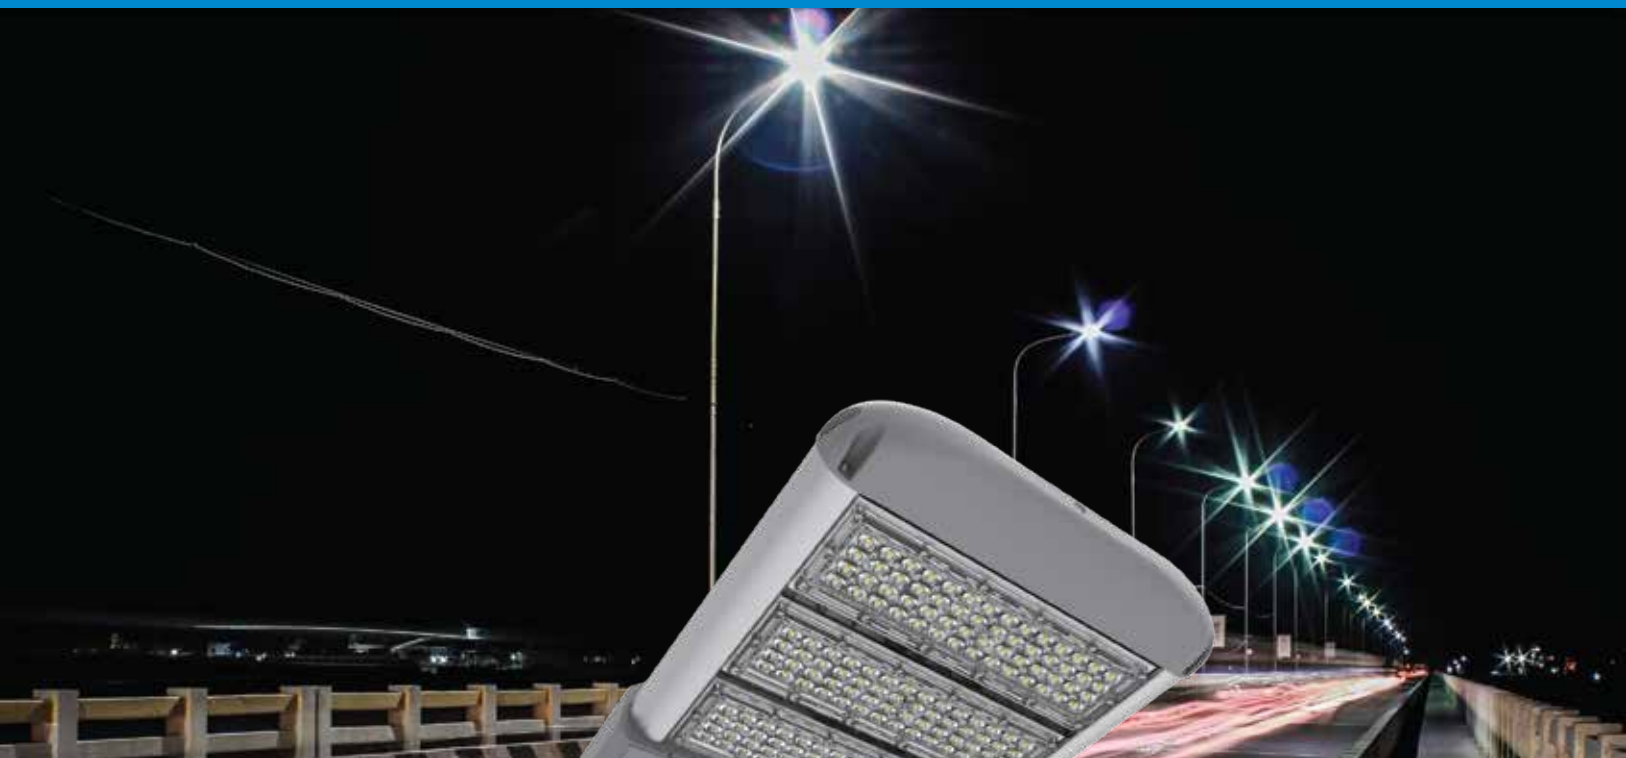

100W



150W



200W



240W



IP66

WATER
PROOF

4500 K

5500 K


Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-HIGH-RO-W-100W	AC 100~277 V	>0.9	100W	12000lm	90°-110°	607*365*80 mm
LED-HIGH-RO-W-150W	AC 100~277 V	>0.9	150W	18000lm	90°-110°	712*365*80 mm
LED-HIGH-RO-W-200W	AC 100~277 V	>0.9	200W	24000lm	90°-110°	817*365*80 mm
LED-HIGH-RO-W-240W	AC 100~277 V	>0.9	240W	28800lm	90°-110°	922*365*80 mm

LED GAS STATION CANOPY / RETROFIT KIT



Professional LED
lighting supplier

Professional lighting

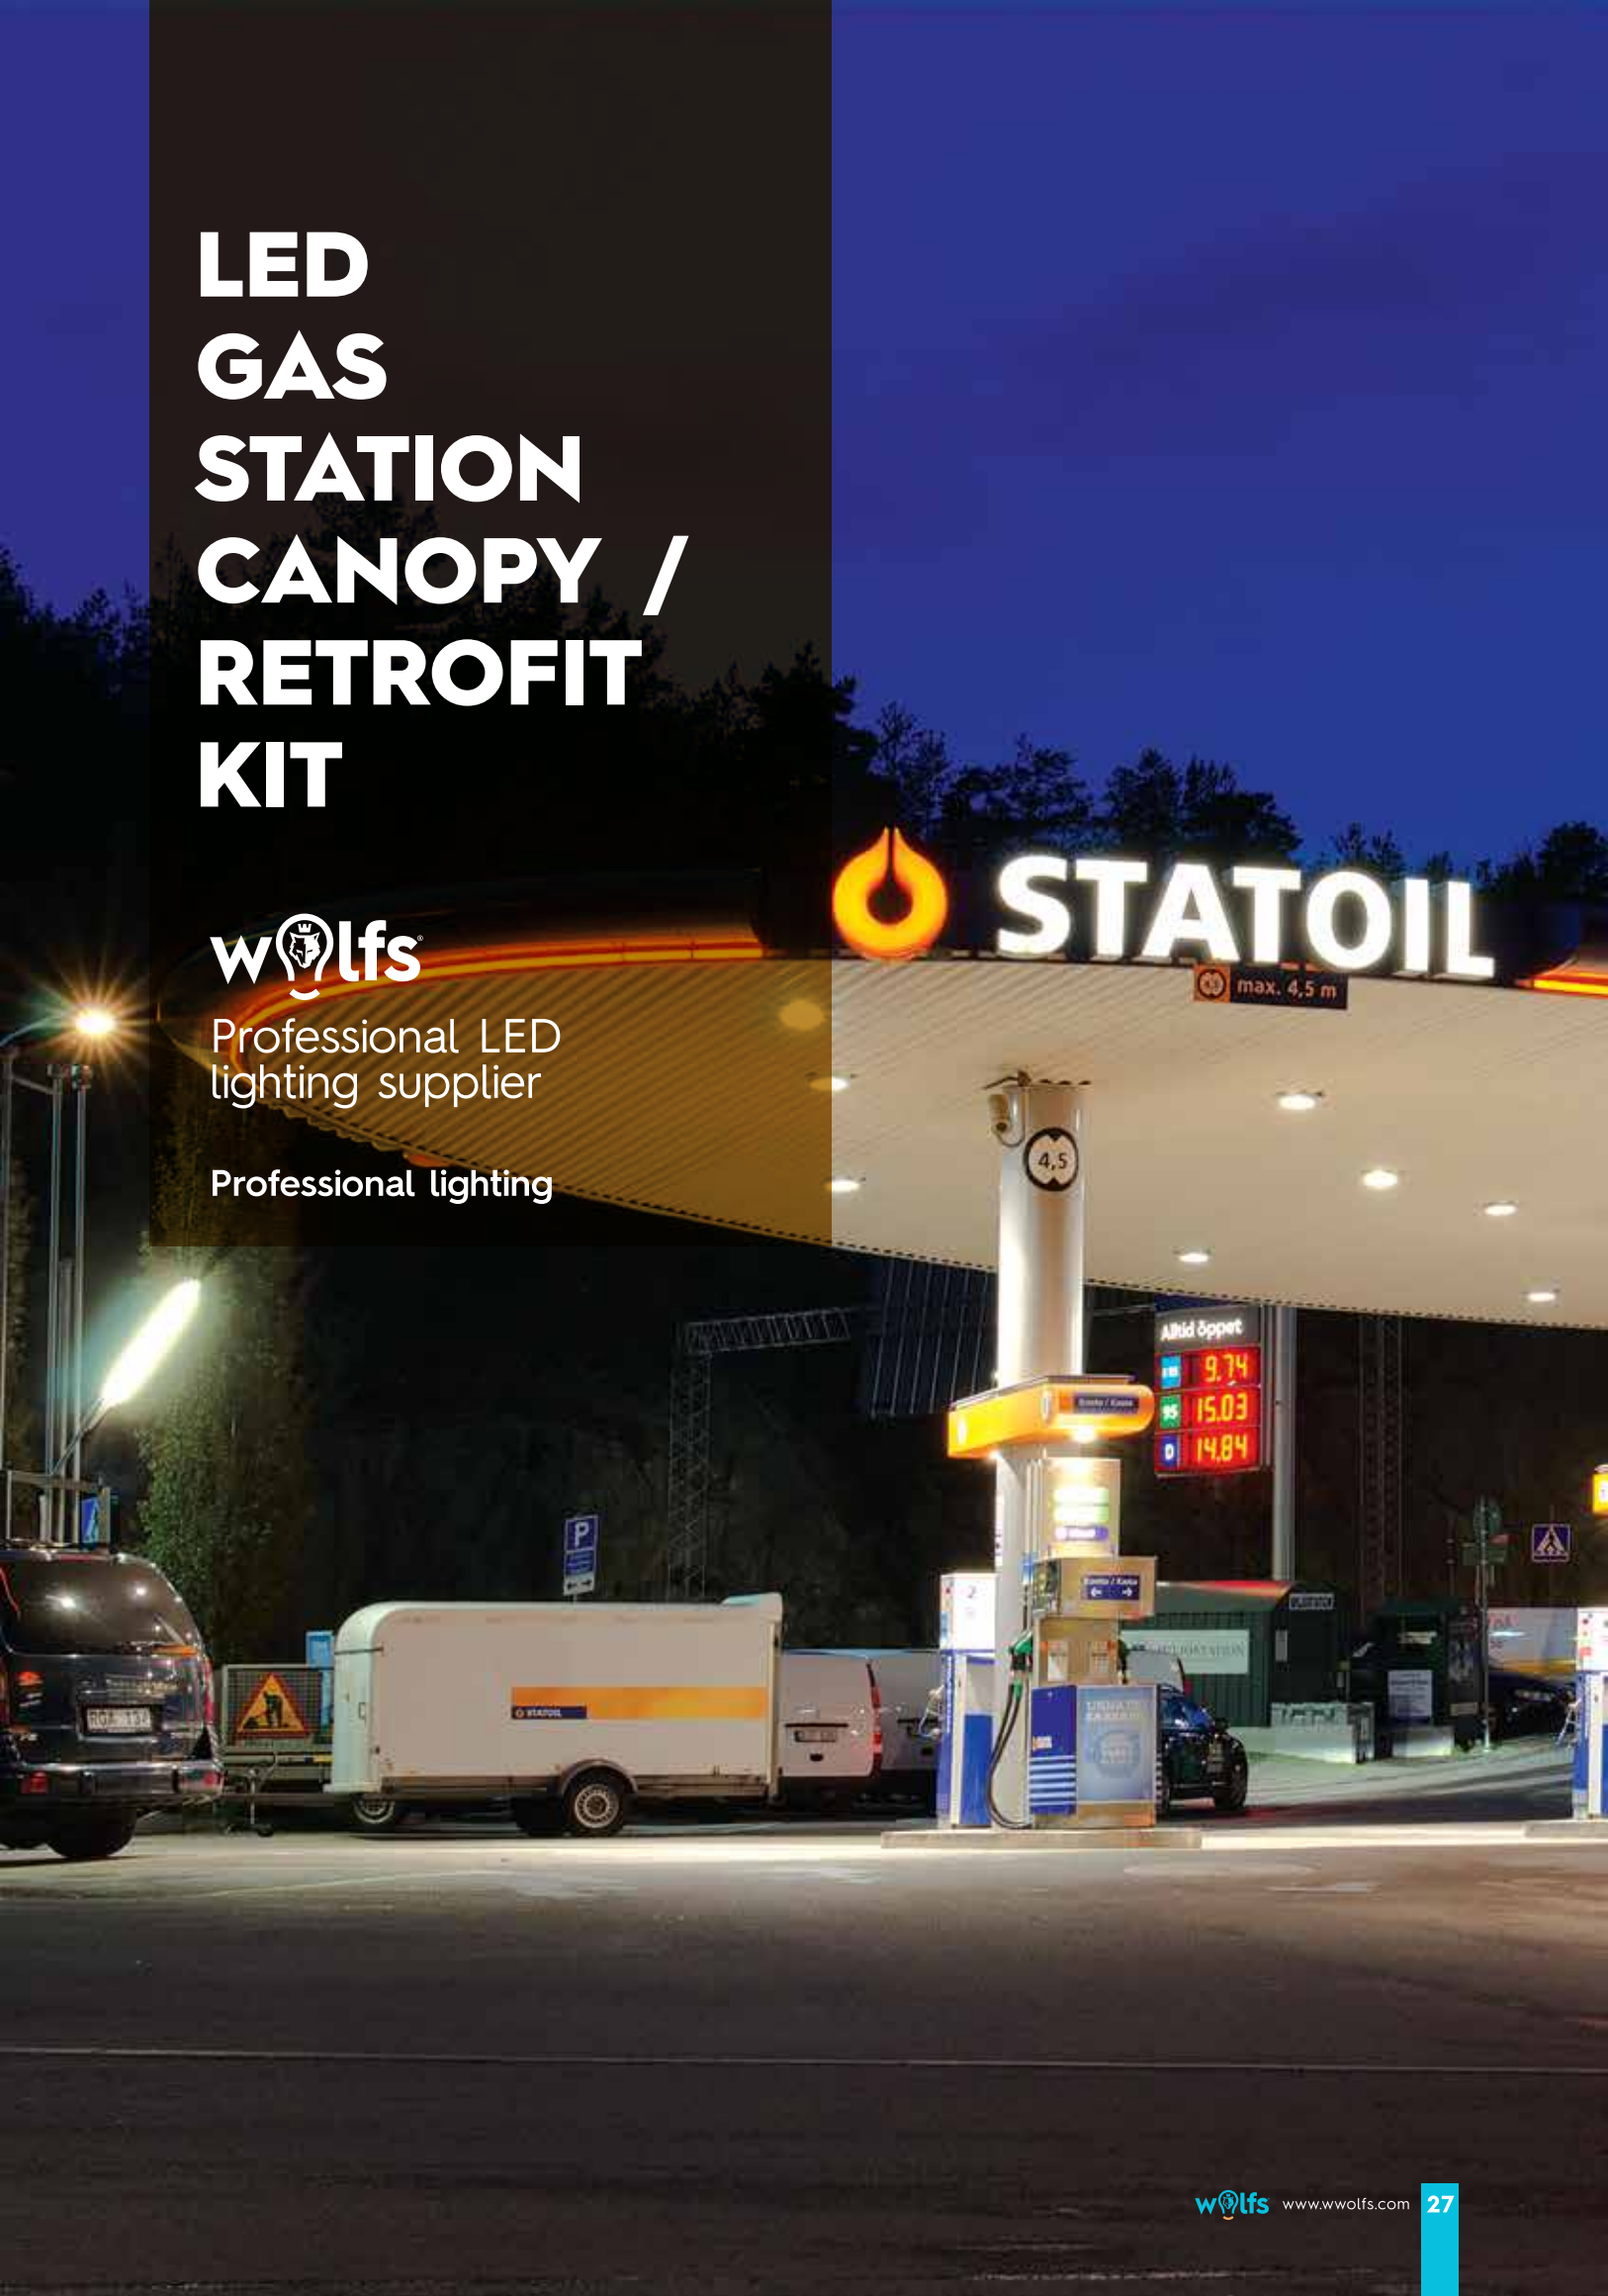


Led Gas Station Canopy



100W



150W



IP65 CORROSION PROOF



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-HIGH-CN-P-100W	AC 100~277 V	>0.9	100W	10500lm	90°-120°	400*412*214 mm
LED-HIGH-CN-P-150W	AC 100~277 V	>0.9	150W	15750lm	90°-120°	464*474*214 mm

Led Canopy Retrofit Kit






100W



150W



200W




IP65 WATER PROOF

4500 K 5500 K

Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-HIGH-CNR-K-100W	AC 100~277 V	>0.9	100W	10500lm	90°-120°	550*550*120 mm
LED-HIGH-CNR-K-150W	AC 100~277 V	>0.9	150W	15750lm	90°-120°	550*550*120 mm
LED-HIGH-CNR-K-200W	AC 100~277 V	>0.9	200W	21000lm	90°-120°	550*550*120 mm


Led Canopy Retrofit Kit

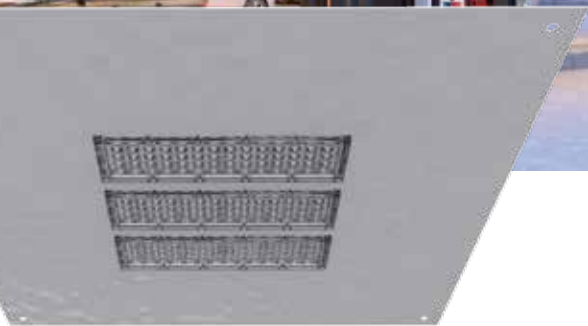

100W




120W



150W



200W




IP65

CORROSION
PROOF

4500 K

5500 K

Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-HIGH-CNR-E-100W	AC 100~277 V	>0.9	100W	12000lm	90°-110°-150°	550*550*77 mm
LED-HIGH-CNR-E-120W	AC 100~277 V	>0.9	120W	14400lm	90°-110°-150°	550*550*77 mm
LED-HIGH-CNR-E-150W	AC 100~277 V	>0.9	150W	18000lm	90°-110°-150°	550*550*77 mm
LED-HIGH-CNR-E-200W	AC 100~277 V	>0.9	200W	24000lm	90°-110°-150°	550*550*77 mm

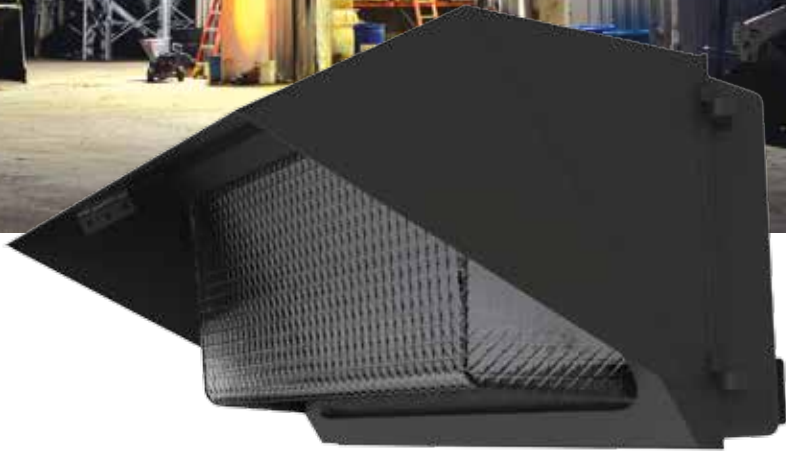

40W



60W



90W



IP65 CORROSION PROOF



Item NO.	Input	PF	Wattage	Lumen	Dimension(L*W*H)
LED-HIGH-WLP-40W	AC 100~277 V	>0.9	40W	3240lm	363*234*330 mm
LED-HIGH-WLP-60W	AC 100~277 V	>0.9	60W	4860lm	423*229*415 mm
LED-HIGH-WLP-90W	AC 100~277 V	>0.9	90W	7290lm	423*229*415 mm

LED GARAGE LIGHT



Professional LED
lighting supplier

Professional lighting


Led Garage Light



50W



100W




IP65 CORROSION PROOF

4500 K 5500 K

Item NO.	Input	PF	Wattage	Lumen	Dimension(L*W*H)
LED-HIGH-GRG-50W	AC 100~277 V	>0.9	50W	5000lm	335*159*114 mm
LED-HIGH-GRG-100W	AC 100~277 V	>0.9	100W	10000lm	650*159*114 mm

Led Garage Light

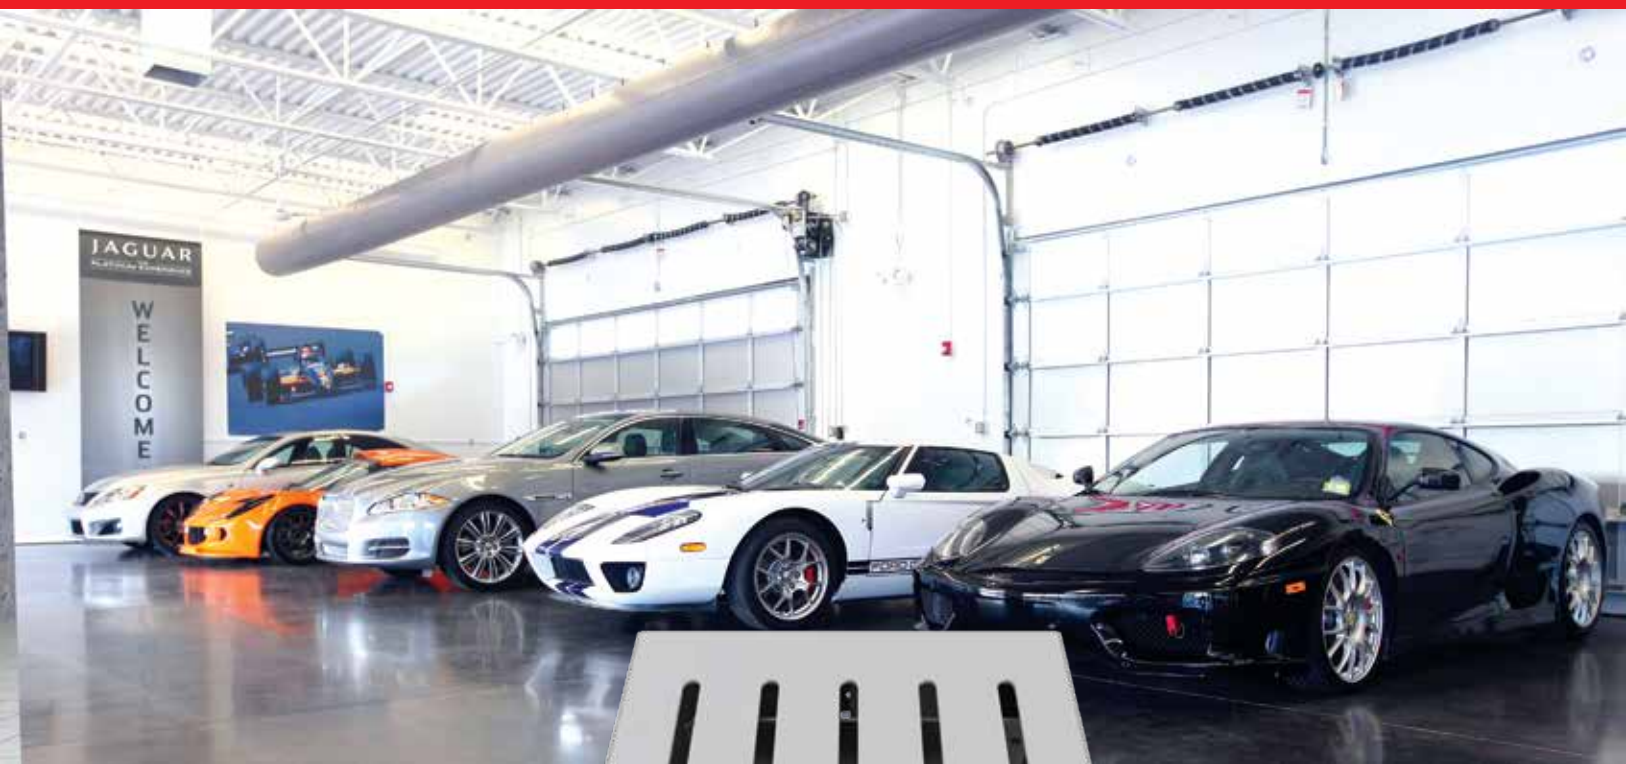

50W



IP65 CORROSION PROOF

4500 K 5500 K

Item NO.	Input	PF	Wattage	Lumen	Dimension(L*W*H)
LED-HIGH-GRG-U-50W	AC 100~277 V	>0.9	50W	5100lm	235*200*223 mm


LED SPOT LIGHT



Professional LED
lighting supplier


Wide Application

Led Spot Light

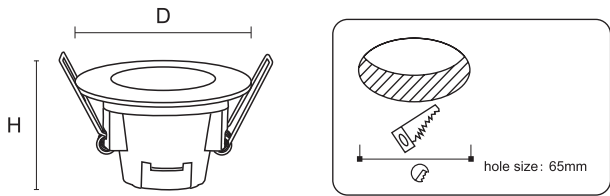

IP65 CORROSION PROOF

PBT housing, fire rating: V-0
PC diffuser, fire rating: V-0
Driver integrated



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(D*H)
LED-SMD-SP-5-Round	AC 100~277 V	>0.9	5W	510lm	120°	50*82mm



Led Spot Light



White

Chrome

Nickel



IP65

CORROSION
PROOF

PBT housing, fire rating: V-0
PC diffuser, fire rating: V-0
Driver integrated

3000 K

4000 K

6500 K



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(W*H)
LED-SMD-SP-5-Square	AC 100~277 V	>0.9	5W	510lm	120°	50*82mm

LED BULKHEAD LIGHT




Professional LED
lighting supplier

Uniform Light

Led Bulkhead Light



AVAILABLE COLOR OF HOUSING

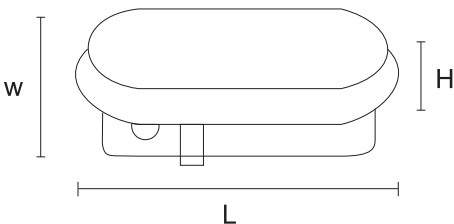

Installation accessories




Multiple directions wiring



IP44 WATER PROOF	Easy installation multiple directions wiring PP base + PC diffuser			3000 K4000 K6500 K		
	Item NO.	Input	PF	Wattage	Lumen	Beam Angle
	LED-BL-Oval-5.5	AC 100~277 V	>0.9	5.5W	510lm	120°
	LED-BL-Oval-10	AC 100~277 V	>0.9	10W	1005lm	120°
						Dimension(L*W*H)
						169*115*76mm
						169*115*76mm


Led Bulkhead Light

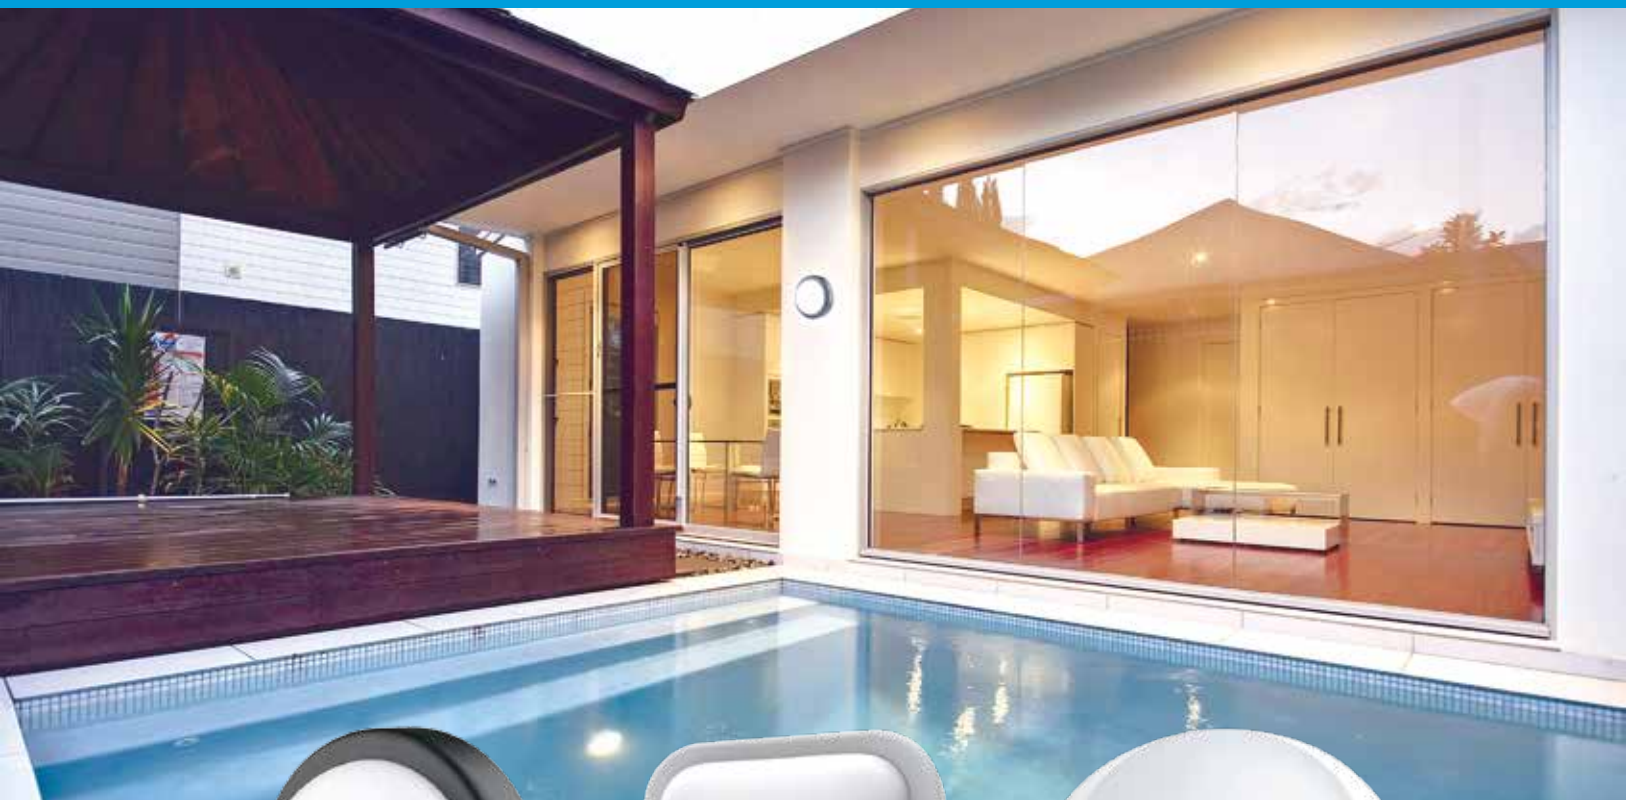

AVAILABLE COLOR OF HOUSING




Installation accessories

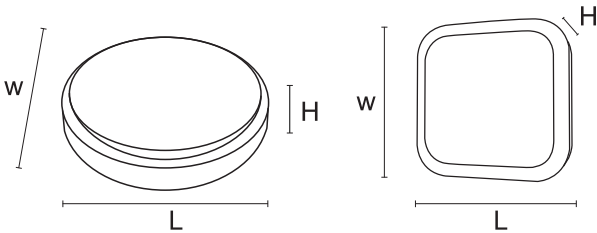

IP44 WATER PROOF		Easy installation ABS Body + PC diffuser classic design			3000 K 4000 K 6500 K	
Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-BL-Round-10	AC 100~277 V	>0.9	10W	1010lm	120°	Ø197*95mm
LED-BL-Round-14	AC 100~277 V	>0.9	14W	1440lm	120°	Ø197*95mm
LED-BL-Round-18	AC 100~277 V	>0.9	18W	1825lm	120°	Ø197*95mm
LED-BL-Square-10	AC 100~277 V	>0.9	10W	1010lm	120°	197*197*95mm
LED-BL-Square-14	AC 100~277 V	>0.9	14W	1440lm	120°	197*197*95mm
LED-BL-Square-18	AC 100~277 V	>0.9	18W	1825lm	120°	197*197*95mm

Led Bulkhead Light Pir Sensor

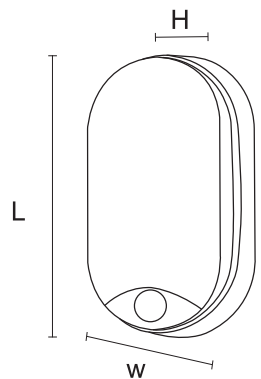

AVAILABLE COLOR OF HOUSING



IP54

CORROSION PROOF

ABS Body + PC diffuser

3000 K




4000 K

6500 K



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-BL-Oval-10-PIR	AC 100~277 V	>0.9	10W	1010lm	120°	194*102*50mm
LED-BL-Oval-14-PIR	AC 100~277 V	>0.9	14W	1440lm	120°	194*102*50mm
LED-BL-Oval-18-PIR	AC 100~277 V	>0.9	18W	1825lm	120°	194*102*50mm

Led Bulkhead Light

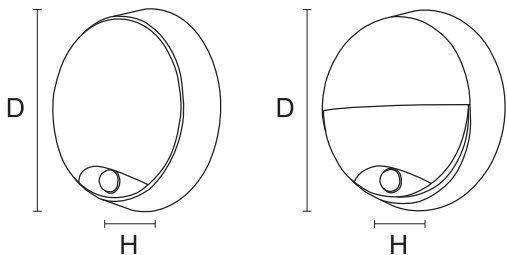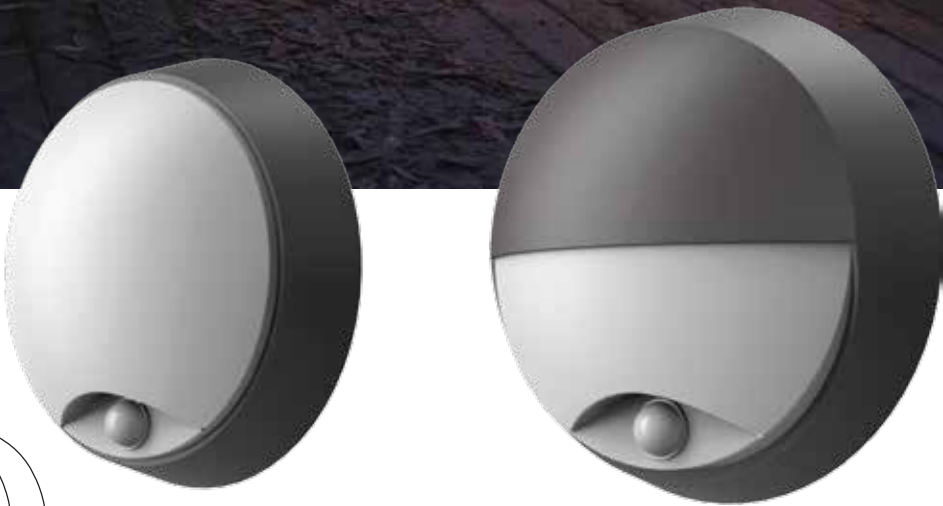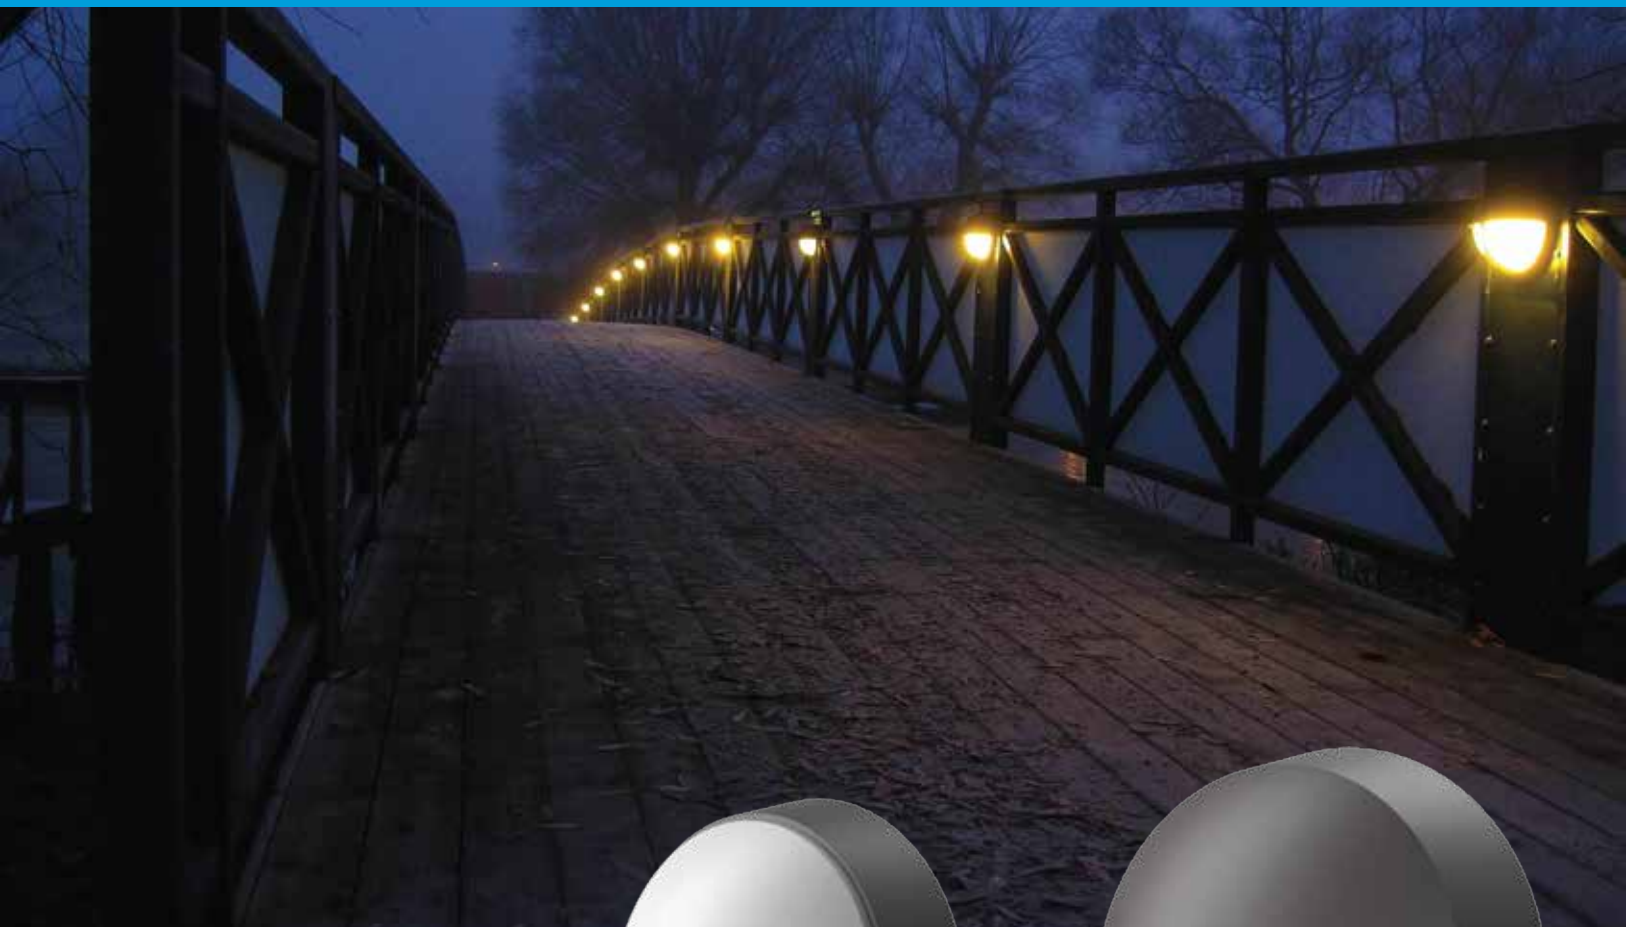


AVAILABLE COLOR OF HOUSING




IP54 CORROSION PROOF

ABS Body + PC diffuser



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(D*H)
LED-BL-Round-A2-10-PIR	AC 100~277 V	>0.9	10W	1010lm	120°	214*80mm
LED-BL-Round-A2-14-PIR	AC 100~277 V	>0.9	14W	1440lm	120°	214*80mm
LED-BL-Round-A2-18-PIR	AC 100~277 V	>0.9	18W	1825lm	120°	214*80mm
LED-BL-Round-10-PIR	AC 100~277 V	>0.9	10W	1010lm	120°	214*80mm
LED-BL-Round-14-PIR	AC 100~277 V	>0.9	14W	1440lm	120°	214*80mm
LED-BL-Round-18-PIR	AC 100~277 V	>0.9	18W	1825lm	120°	214*80mm

Led Bulkhead Grill Light



Installation accessories



AVAILABLE COLOR OF HOUSING



IP44 WATER PROOF

Easy installation
ABS Body + PC diffuser
classic design

3000 K 4000 K 6500 K

Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(D*H)
LED-BL-Round-10-Grill	AC 100~277 V	>0.9	10W	1010lm	120°	Ø197*95mm
LED-BL-Round-14-Grill	AC 100~277 V	>0.9	14W	1440lm	120°	Ø197*95mm
LED-BL-Round-18-Grill	AC 100~277 V	>0.9	18W	1825lm	120°	Ø197*95mm

LED CEILING LIGHT




Professional LED
lighting supplier

Easy light, Comfortable life



Led Ceiling Light



Installation accessories





IP20 DUST PROOF		Classic design PMMA diffuser Glow wire test 650 °C			3000 K 4000 K 6500 K	
Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(D*H)
LED-EC-6	AC 100~277 V	>0.9	6W	605lm	120°	Ø170*75mm
LED-EC-12	AC 100~277 V	>0.9	12W	1200lm	120°	Ø240*85mm
LED-EC-18	AC 100~277 V	>0.9	18W	1825lm	120°	Ø320*100mm
LED-EC-24	AC 100~277 V	>0.9	24W	2410lm	120°	Ø320*100mm

Led Ceiling Light HF Sensor




Specification

HF system: 5.8 GHz, CW electric wave, ISM band
Transmission power: <0.2 mW
Power consumption: approx. 0.5 W
Detection angle: 360°
Note: The high-frequency output of this sensor is <0.2 mW—that is just one 5000 of the transmission power of a mobil phone or the output of a microwave oven.

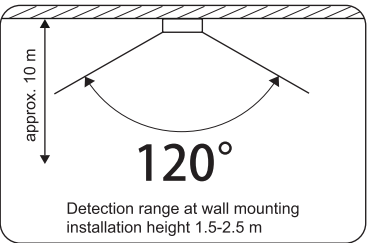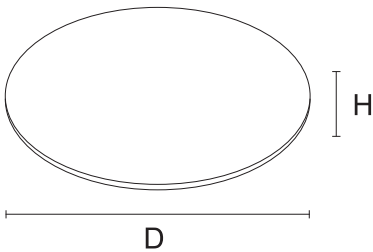


Time setting

NO	S1	S2	Time
	0	0	10 sec ± 3 sec
1	0	1	3 min ± 10 sec
2	1	0	6 min ± 30 sec
	1	1	12 min ± 1 min

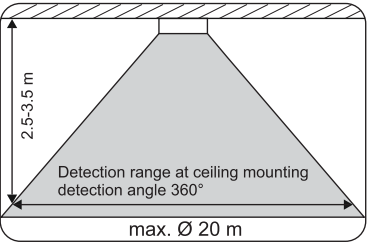

Light control


	S3	S4	LUX
	0	0	OFF
3	0	1	10 lux
4	1	0	50 lux
	1	1	100 lux

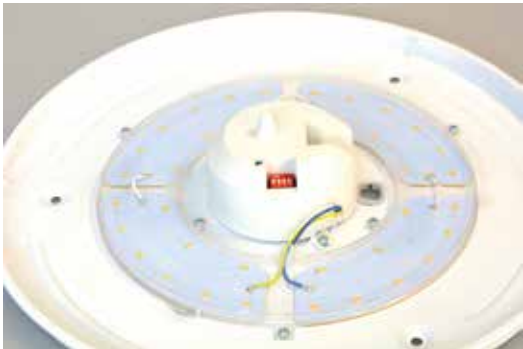

Installation accessories



IP20 DUST PROOF



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(D*H)
LED-EC-18	AC 100~277 V	>0.9	18W	1825lm	120°	Ø320*100mm
LED-EC-24	AC 100~277 V	>0.9	24W	2410lm	120°	Ø320*100mm



Slim Design





LIGHT SENSOR
HF SENSOR




Installation accessories



IP20 DUST PROOF	Available With Standard Vesion Color changeable & Dimmable Vesrion HF Sensor Version				3000 K 4000 K 6500 K	
						
Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(D*H)
LED-LY-CL5-16	AC 100~277 V	>0.9	16W	1610lm	120°	Ø280*40mm
LED-LY-CL5-20	AC 100~277 V	>0.9	20W	2100lm	120°	Ø345*40mm
LED-LY-CL5-24	AC 100~277 V	>0.9	24W	2440lm	120°	Ø420*40mm

Led Ceiling Light

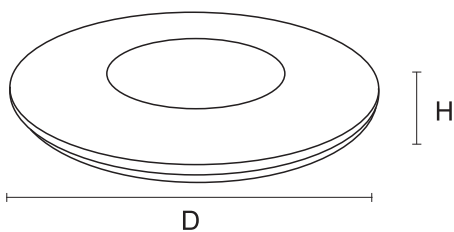

Installation accessories




Remote Control



IP20 DUST PROOF

Dimmable
Color changeable
With night-light

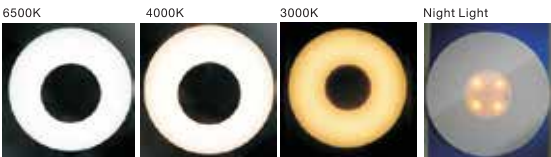


Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(D*H)
LED-DIM-CL4-48	AC 100~277 V	>0.9	48W	4840lm	120°	Ø450*50mm
LED-DIM-CL4-60	AC 100~277 V	>0.9	60W	6100lm	120°	Ø550*50mm

Led Ceiling Light




Installation accessories

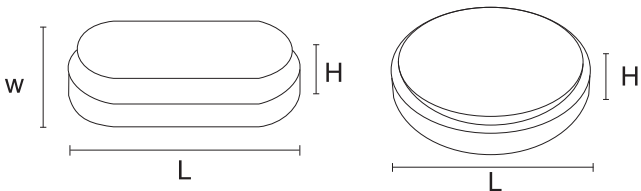

IP54 CRROSION PROOF		ANTI-IV PC Base + PC Diffueor Glow wire test 650 °C			3000 K 4000 K 6500 K	
Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-CL1-Round-10	AC 100~277 V	>0.9	10W	1010lm	120°	Ø175*50mm
LED-CL1-Round-15	AC 100~277 V	>0.9	15W	1520lm	120°	Ø225*50mm
LED-CL1-Round-20	AC 100~277 V	>0.9	20W	2100lm	120°	Ø265*50mm
LED-CL1-Round-24	AC 100~277 V	>0.9	24W	2440lm	120°	Ø310*56mm
LED-CL1-Round-28	AC 100~277 V	>0.9	28W	2825lm	120°	Ø310*56mm
LED-CL1-Oval-12	AC 100~277 V	>0.9	12W	1210lm	120°	235*110*56mm
LED-CL1-Oval-15	AC 100~277 V	>0.9	15W	1520lm	120°	235*110*56mm

Led Ceiling Light

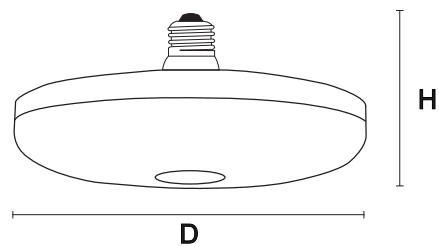

IP20 DUST PROOF		Easy installation and replacement With E27 base			3000 K 4000 K 6500 K	
Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(D*H)
LED-Ceiling E27-20	AC 100~277 V	>0.9	20W	2100lm	120°	Ø150*82mm
LED-Ceiling E27-30	AC 100~277 V	>0.9	30W	3150lm	120°	Ø200*100mm


LED BATTEN LIGHT



Professional LED
lighting supplier



Wide Application

Led T8 Glass Tube

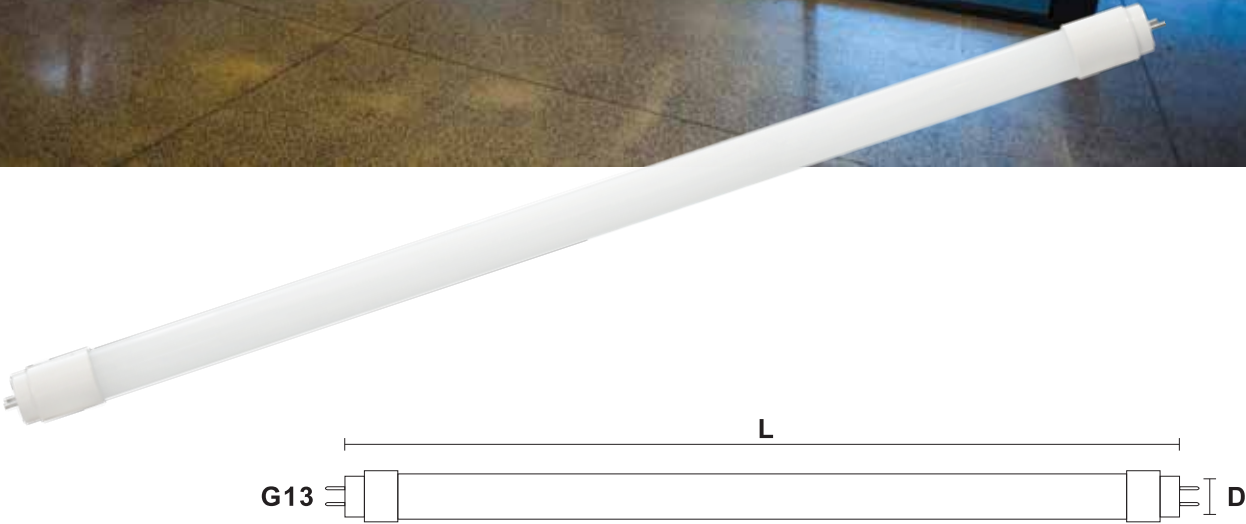

Full glass tube


LED ▶ Fluorescent	
9W	▶ 18W
18W	▶ 36W
24W	▶ 58W





IP20 DUST PROOF

Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*D)
LED-T8-GL/ECO-60-9	AC 100~277 V	>0.9	9W	910lm	220°	600*30mm
LED-T8-GL/ECO-120-18	AC 100~277 V	>0.9	18W	1825lm	220°	1200*30mm
LED-T8-GL/ECO-150-24	AC 100~277 V	>0.9	24W	2440lm	220°	1500*30mm
LED-T8-GL/STD-60-9	AC 100~277 V	>0.9	9W	910lm	220°	600*30mm
LED-T8-GL/STD-120-18	AC 100~277 V	>0.9	18W	1825lm	220°	1200*30mm
LED-T8-GL/STD-150-24	AC 100~277 V	>0.9	24W	2440lm	220°	1500*30mm

T8 Fixture + Led T8 Tube

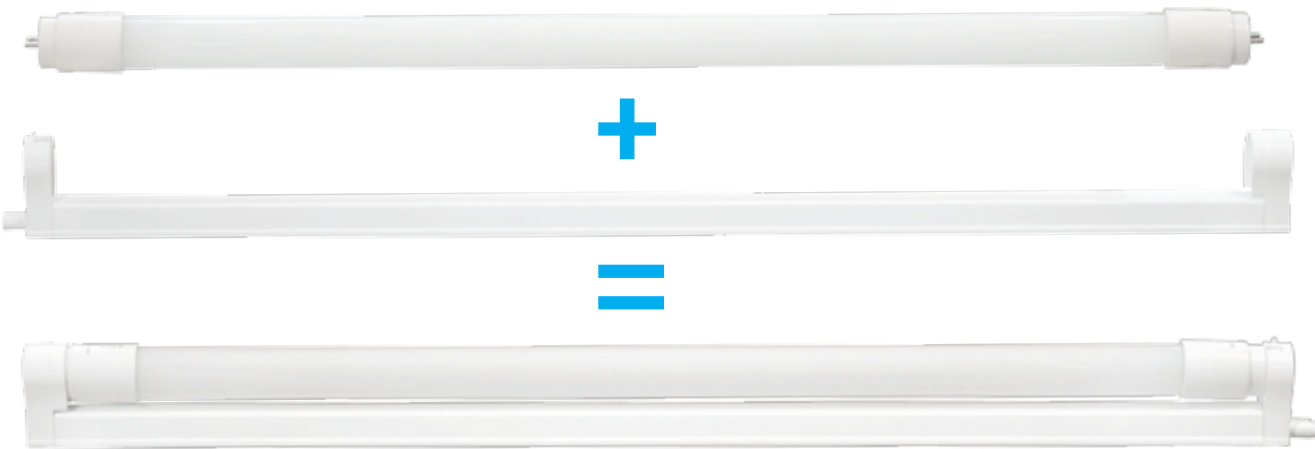


Installation accessories

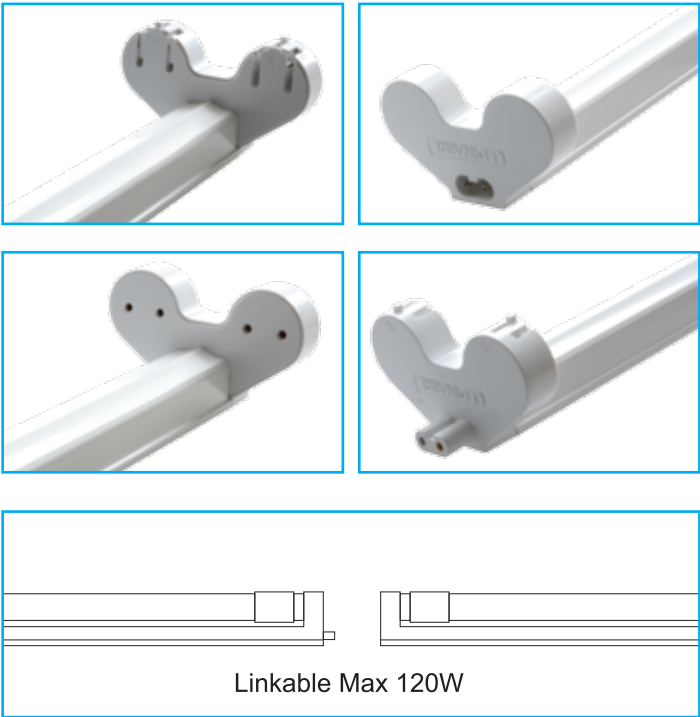


IP20 DUST PROOF

Easy Installation
Easy Replacement




Item NO.	Input	Wattage	Dimension(L*W*H)
T8 Fixture+LED T8 tube-1-600	AC 100~277 V	9W	628*29*52mm
T8 Fixture+LED T8 tube-1-1200	AC 100~277 V	18W	1238*29*52mm
T8 Fixture+LED T8 tube-1-1500	AC 100~277 V	24W	1538*29*52mm
T8 Fixture+LED T8 tube-2-600	AC 100~277 V	9W*2	628*75*45mm
T8 Fixture+LED T8 tube-2-1200	AC 100~277 V	18W*2	1238*75*45mm
T8 Fixture+LED T8 tube-2-1500	AC 100~277 V	24W*2	1538*75*45mm

Led T5 Fixture


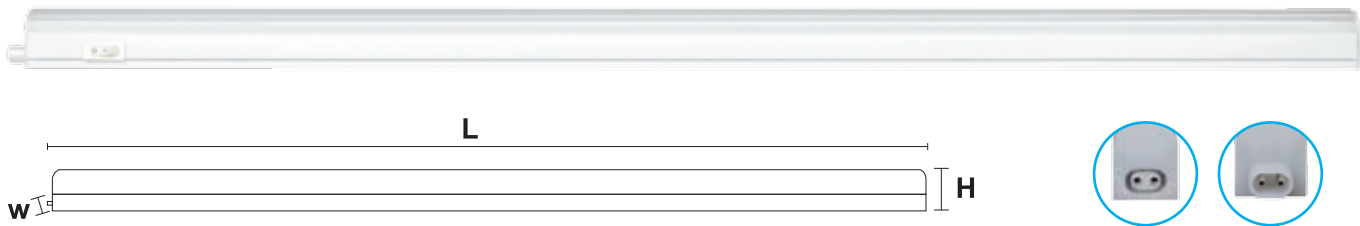


Installation accessories Alternative

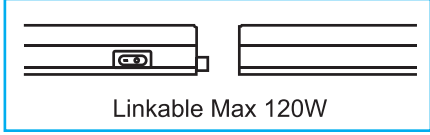


IP20 DUST PROOF	Integrated PC Housing		3000 K 4000 K 6500 K			
Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-T5-300-4	AC 100~277 V	>0.9	4W	420lm	120°	307*21*34mm
LED-T5-600-8	AC 100~277 V	>0.9	8W	810lm	120°	552.5*21*34mm
LED-T5-900-11	AC 100~277 V	>0.9	11W	1100lm	120°	852.5*21*34mm
LED-T5-1200-14	AC 100~277 V	>0.9	14W	1440lm	120°	1152.5*21*34mm
LED-T5-1200-16	AC 100~277 V	>0.9	16W	1620lm	120°	1152.5*21*34mm
LED-T5-1200-18	AC 100~277 V	>0.9	18W	1825lm	120°	1152.5*21*34mm

Led T8 Fixture

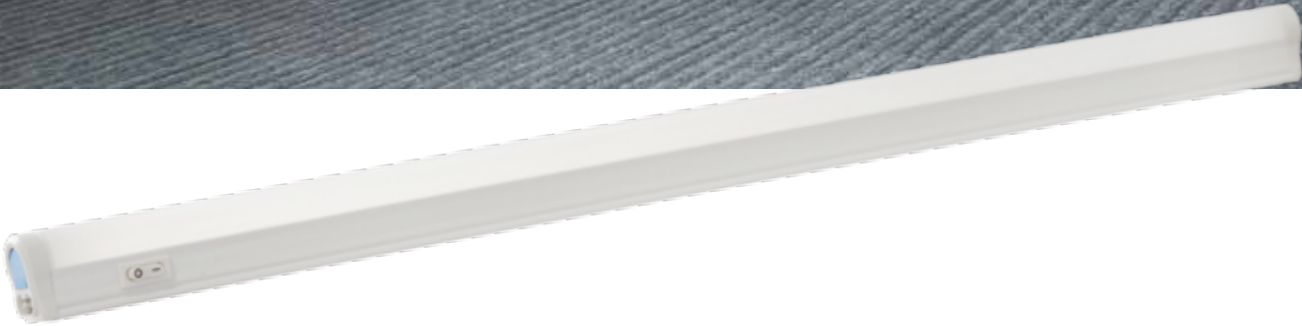

Installation accessories Alternative

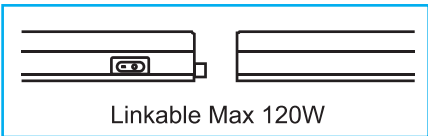



IP20 DUST PROOF	Integrated PC Housing	3000 K 4000 K 6500 K
------------------------	-----------------------	----------------------------

Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-T8-B300-5	AC 100~277 V	>0.9	5W	510lm	120°	320*25*35mm
LED-T8-B600-10	AC 100~277 V	>0.9	10W	1100lm	120°	600*25*35mm
LED-T8-B900-15	AC 100~277 V	>0.9	15W	1510lm	120°	900*25*35mm
LED-T8-B1200-20	AC 100~277 V	>0.9	20W	2100lm	120°	1200*25*35mm


Led Waterproof Fixture C-E



Installation accessories

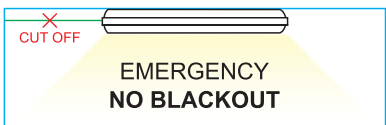

Emergency Power: 3w
Battery: 6.0V 2000mAh Ni-cd
Recharge time: 24 hours
Use time: 3 hours

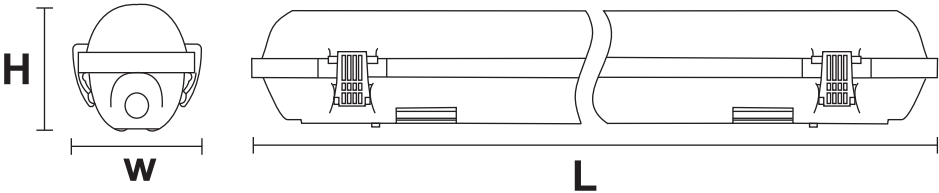

IP65 CORROSION PROOF



IK08 ANTI-IMPACT

Anti-UV
Glow wire test 650 °C

3000 K 4000 K 6500 K

Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-118C-E-600-11.5	AC 100~277 V	>0.9	11.5W	1150lm	120°	655*89*92mm
LED-136C-E-1200-23	AC 100~277 V	>0.9	23W	2310lm	120°	1265*89*92mm
LED-158C-E-1500-30	AC 100~277 V	>0.9	30W	3150lm	120°	1565*89*92mm
LED-218C-E-600-23	AC 100~277 V	>0.9	23W	2310lm	120°	655*130*92mm
LED-236C-E-1200-48	AC 100~277 V	>0.9	48W	4820lm	120°	1265*130*92mm
LED-258C-E-1500-58	AC 100~277 V	>0.9	58W	5810lm	120°	1565*130*92mm


Waterproof Fixture A

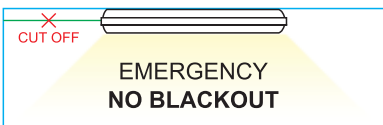

extendable

Emergency Power: 3w
Battery: 6.0V 2000mAh Ni-cd
Recharge time: 24 hours
Use time: 3 hours

Installation accessories

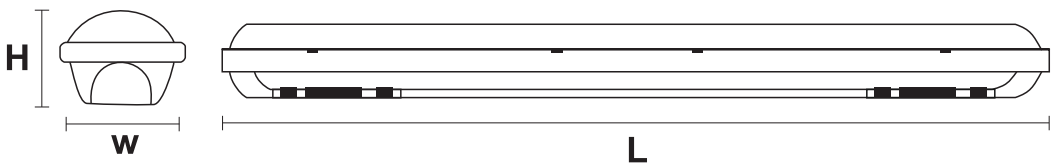


IP65

CORROSION
PROOF

IK08

ANTI-IMPACT

Anti-UV
Glow wire test 650 °C




Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-TPA-600-12	AC 100~277 V	>0.9	12W	1220lm	120°	590*86*66mm
LED-TPA-600-18	AC 100~277 V	>0.9	18W	1825lm	120°	590*86*66mm
LED-TPA-1200-24	AC 100~277 V	>0.9	24W	2440lm	120°	1180*86*66mm
LED-TPA-1200-36	AC 100~277 V	>0.9	36W	3620lm	120°	1180*86*66mm
LED-TPA-1500-30	AC 100~277 V	>0.9	30W	3100lm	120°	1480*86*72mm
LED-TPA-1500-48	AC 100~277 V	>0.9	48W	4820lm	120°	1480*86*72mm

Waterproof Fixture



LED T8 TUBE Replaceable

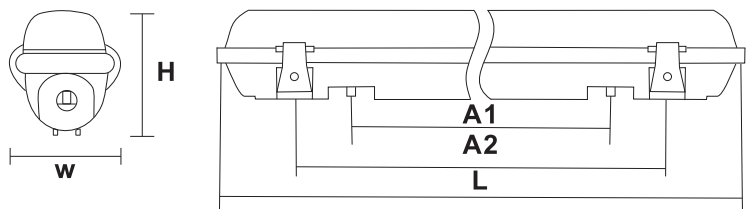


Installation accessories



IP65 CORROSION PROOF


IK08 ANTI-IMPACT

Anti-UV
Glow wire test 650 °C



Item NO.	A1	A2	T8 LED Tube	Dimension(L*W*H)
TP118-0.6M	420mm	530mm	1*9W	655*72*86mm
TP218-0.6M	420mm	530mm	2*9W	655*115*86mm
TP136-1.2M	900mm	1010mm	1*18W	1225*72*86mm
TP236-1.2M	900mm	1010mm	2*18W	1225*115*86mm
TP158-1.5M	1000mm	1100mm	1*24W	1565*72*86mm
TP258-1.5M	1000mm	1100mm	2*24W	1565*115*86mm

Waterproof Fixture E

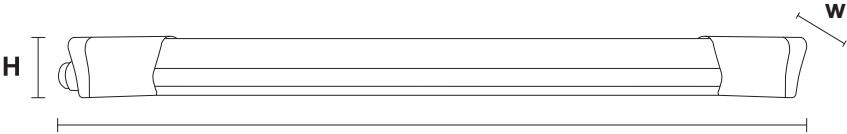

Installation accessories



IP65

CORROSION
PROOF

IK08


ANTI-IMPACT

Anti-UV
Glow wire test 650 °C
Integrated PC Housing

3000 K 4000 K 6500 K

Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-TPE-600-20	AC 100~277 V	>0.9	20W	2100lm	120°	600*78*65mm
LED-TPE-1200-40	AC 100~277 V	>0.9	40W	4040lm	120°	1200*78*65mm
LED-TPE-1500-50	AC 100~277 V	>0.9	50W	5120lm	120°	1500*78*65mm

Led Batten B

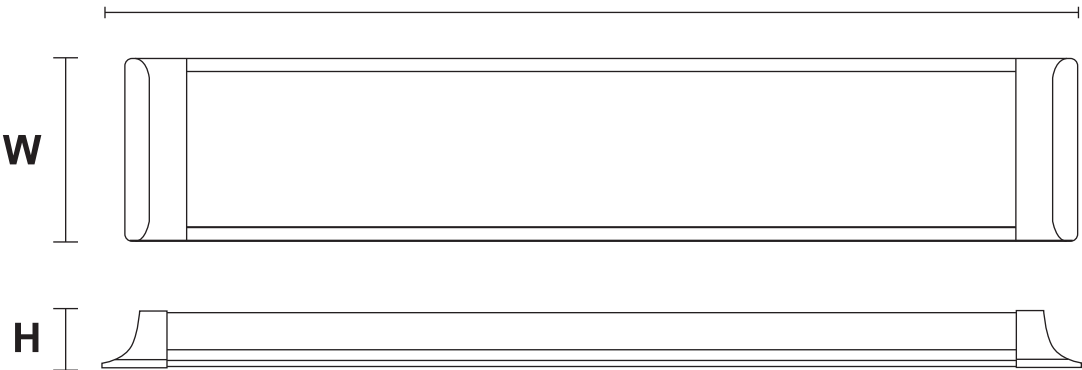

Installation accessories



Installation accessories



IP20 DUST PROOF		Slim Design Easy installation Aluminum+PC			3000 K 4000 K 6500 K	
Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-Batten-B-300-9	AC 100~277 V	>0.9	9W	910lm	120°	300*75*25.5mm
LED-Batten-B-600-18	AC 100~277 V	>0.9	18W	1825lm	120°	600*75*25.5mm
LED-Batten-B-900-27	AC 100~277 V	>0.9	27W	2750lm	120°	900*75*25.5mm
LED-Batten-B-1200-36	AC 100~277 V	>0.9	36W	3620lm	120°	1200*75*25.5mm
LED-Batten-B-1500-45	AC 100~277 V	>0.9	45W	4520lm	120°	1500*75*25.5mm

Led Batten C




Installation accessories



IP20 DUST PROOF	Linkable 18W : extensible up to 35 pcs 36W: extensible up to 15 pcs				3000 K 4000 K 6500 K	
Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-Batten-C-300-9	AC 100~277 V	>0.9	9W	910lm	120°	315*75*25.5mm
LED-Batten-C-600-18	AC 100~277 V	>0.9	18W	1825lm	120°	615*75*25.5mm
LED-Batten-C-900-27	AC 100~277 V	>0.9	27W	2750lm	120°	915*75*25.5mm
LED-Batten-C-1200-36	AC 100~277 V	>0.9	36W	3620lm	120°	1215*75*25.5mm
LED-Batten-C-1500-45	AC 100~277 V	>0.9	45W	4520lm	120°	1515*75*25.5mm

Led Batten F

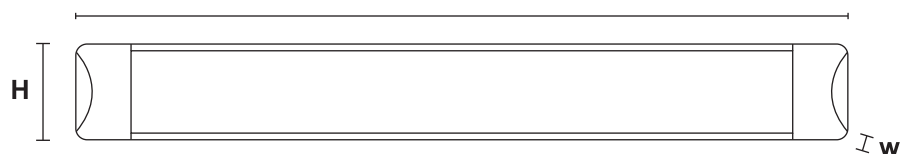


Installation accessories



IP20 DUST PROOF

Slim design
Easy installation



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-Batten-F-300-9	AC 100~277 V	>0.9	9W	910lm	120°	315*75*25.5mm
LED-Batten-F-600-18	AC 100~277 V	>0.9	18W	1825lm	120°	615*75*25.5mm
LED-Batten-F-1200-20	AC 100~277 V	>0.9	20W	2100lm	120°	1215*75*25.5mm

Led Batten C




Installation accessories




IP20 DUST PROOF	Slim design Easy installation Wiht on/off switch			3000 K 4000 K 6500 K			
	Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
	LED-Batten-K-300-9	AC 100~277 V	>0.9	9W	910lm	120°	315*75*25.5mm
	LED-Batten-K-600-18	AC 100~277 V	>0.9	18W	1825lm	120°	615*75*25.5mm
	LED-Batten-K-1200-36	AC 100~277 V	>0.9	36W	3600lm	120°	1215*75*25.5mm
	LED-Batten-K-1500-45	AC 100~277 V	>0.9	45W	4510lm	120°	1515*75*25.5mm

Led Wide Batten

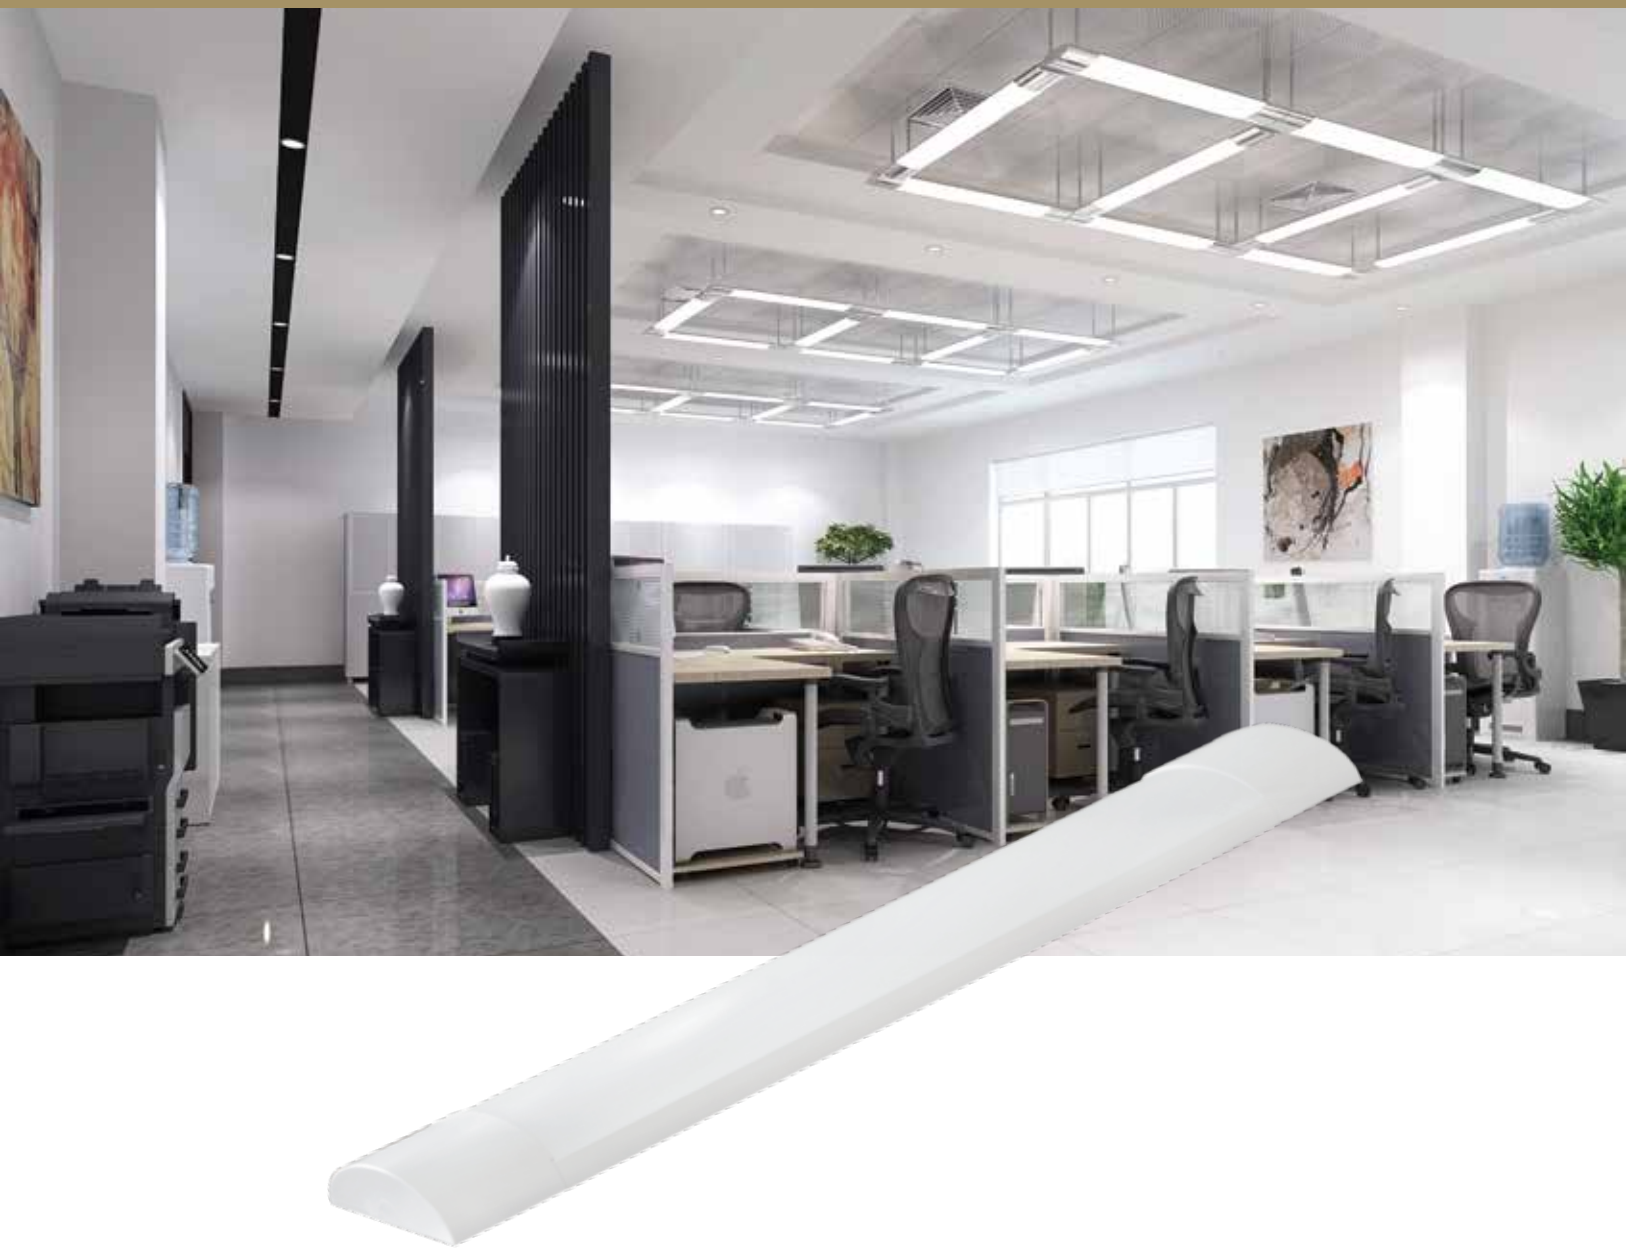


Installation accessories



IP20 DUST PROOF		Aluminum housing + PC diffusor			3000 K4000 K6500 K	
Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-Wide Batten-600-20	AC 100~277 V	>0.9	20W	2100lm	120°	612*120*40mm
LED-Wide Batten-1200-36	AC 100~277 V	>0.9	36W	3620lm	120°	1212*120*40mm
LED-Wide Batten-1500-45	AC 100~277 V	>0.9	45W	4520lm	120°	1500*120*40mm


LED IP65 Batten

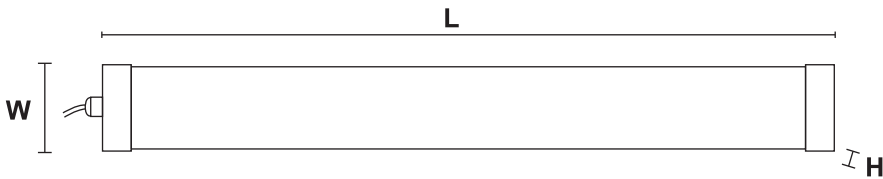

IP65

**CORROSION
PROOF**

Slim design
Easy installation





Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-Batten-TM20-B-600	AC 100~277 V	>0.9	20W	2100lm	150°	600*74.8*37.5mm
LED-Batten-TM25-B-1200	AC 100~277 V	>0.9	25W	2550lm	150°	1200*74.8*37.5mm
LED-Batten-TM40-B-1200	AC 100~277 V	>0.9	40W	4200lm	150°	1200*74.8*37.5mm

LED PANEL LIGHT



Professional LED
lighting supplier

Led Panel Light

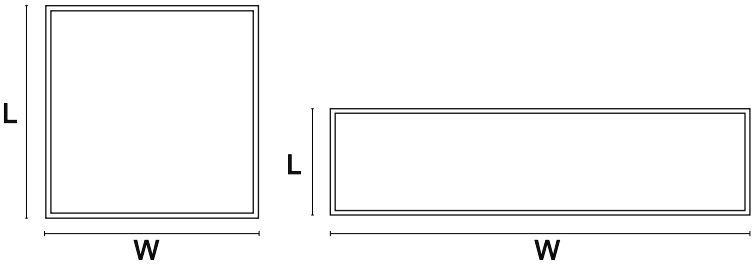


AVAILABLE COLOR FOR FRAME



IP20 DUST PROOF

Available with
* Standart Version * Emrtgency Version
* Dimmable Version (0-10V; DALI)



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-P1-6060-40	AC 100~277 V	>0.9	40W	4200lm	120°	595*595*9mm
LED-P1-6060-45	AC 100~277 V	>0.9	45W	4550lm	120°	595*595*9mm
LED-P1-30120-40	AC 100~277 V	>0.9	40W	4200lm	120°	295*1195*9mm
LED-P1-30120-45	AC 100~277 V	>0.9	45W	4550lm	120°	295*1195*9mm

Led Panel Light Accessories

1 Independent Driver



2 Spring For Recessed Mounting




3 Frame For Ceiling Mounting



4 Accessories For Suspension Mounting



Led Panel Light

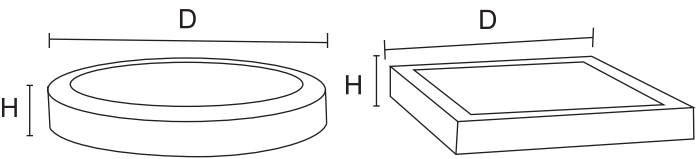

Installation accessories





IP20 DUST PROOF	Surface mounted Die-casting Aluminium housing		3000 K 4000 K 6500 K			
Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(D*H)
LED-P2-MR-3'-6	AC 100~277 V	>0.9	6W	630lm	120°	Ø120*38mm
LED-P2-MR-6'-12	AC 100~277 V	>0.9	12W	1210lm	120°	Ø170*38mm
LED-P2-MR-8'-18	AC 100~277 V	>0.9	18W	1825lm	120°	Ø225*38mm
LED-P2-MR-10'-24	AC 100~277 V	>0.9	24W	2440lm	120°	Ø300*38mm
LED-P2-MS-3'-6	AC 100~277 V	>0.9	6W	630lm	120°	120*120*38mm
LED-P2-MS-6'-12	AC 100~277 V	>0.9	12W	1210lm	120°	170*170*38mm
LED-P2-MS-8'-18	AC 100~277 V	>0.9	18W	1825lm	120°	225*225*38mm
LED-P2-MS-10'-24	AC 100~277 V	>0.9	24W	2440lm	120°	300*300*38mm

Led Panel Light



Installation accessories





IP20 DUST PROOF		Die-casting Aluminium housing			3000 K4000 K6500 K	
Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(D*H)
LED-P2-RR-3'-6	AC 100~277 V	>0.9	6W	630lm	120°	Ø120*22mm
LED-P2-RR-6'-12	AC 100~277 V	>0.9	12W	1210lm	120°	Ø170*22mm
LED-P2-RR-8'-18	AC 100~277 V	>0.9	18W	1825lm	120°	Ø225*22mm
LED-P2-RR-10'-24	AC 100~277 V	>0.9	24W	2440lm	120°	Ø300*22mm
LED-P2-RS-3'-6	AC 100~277 V	>0.9	6W	630lm	120°	120*120*22mm
LED-P2-RS-6'-12	AC 100~277 V	>0.9	12W	1210lm	120°	170*170*22mm
LED-P2-RS-8'-18	AC 100~277 V	>0.9	18W	1825lm	120°	225*225*22mm
LED-P2-RS-10'-24	AC 100~277 V	>0.9	24W	2440lm	120°	300*300*22mm

Led Panel Light



Installation accessories

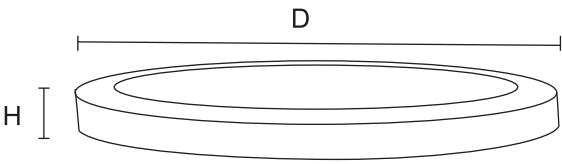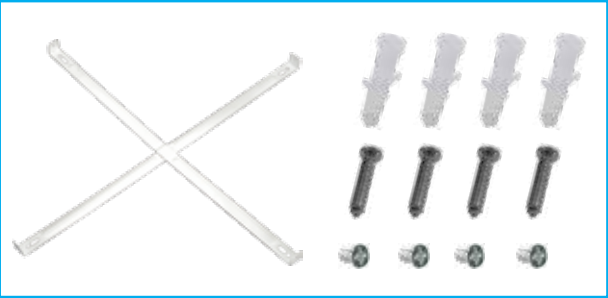

IP20 DUST PROOF		Large size suitable for large space Die-casting Aluminium housing			3000 K 4000 K 6500 K	
Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(D*H)
LED-P4-MR-400-28	AC 100~277 V	>0.9	28W	2850lm	120°	Ø400*35mm
LED-P4-MR-600-48	AC 100~277 V	>0.9	48W	4820lm	120°	Ø600*35mm

LED DRAWER LIGHT



Professional LED
lighting supplier

Classic & Smart


Led Drawer Light









IR



PIR

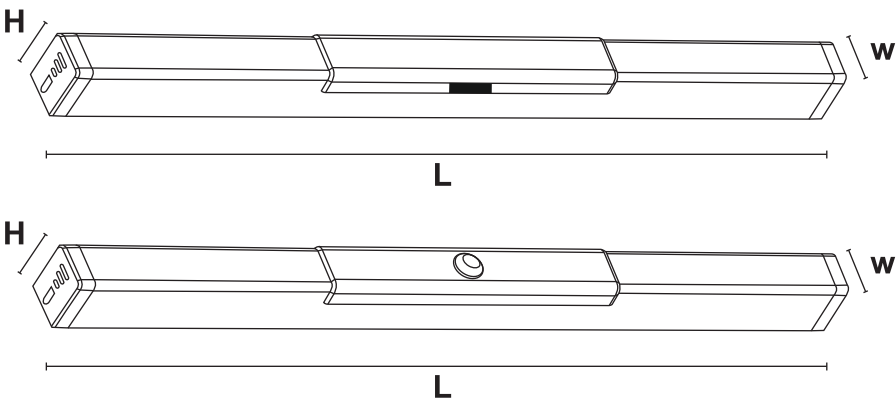


Features



IP20 DUST PROOF

Power by 4 PCS AAA dry battery
Mounted by magnet







Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-BLS17-300-0.8W-IR	DC6V	>0.9	0.8W	50lm	120°	300*17*18mm
LED-BLS17-300-0.8W-PIR	DC6V	>0.9	0.8W	50lm	120°	300*17*18mm

Led Drawer Light




Installation accessories

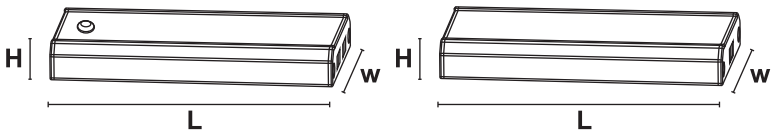

IP20 DUST PROOF

With build-in lithium battery
120mAh capacity
USB charge
charge time 5-8 hrs
Mounted by magnet



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-BLS47-0.8W-IR	DC4.2-5V	>0.9	0.8W	50lm	120°	100*49*13mm
LED-BLS47-0.8W-PIR	DC4.2-5V	>0.9	0.8W	50lm	120°	100*49*13mm

LED CABINET LIGHT



Professional LED
lighting supplier

Seamless connection




CHANEL

CHANEL

Led Cabinet Light




Installation accessories

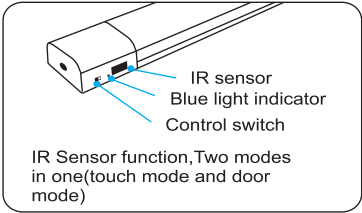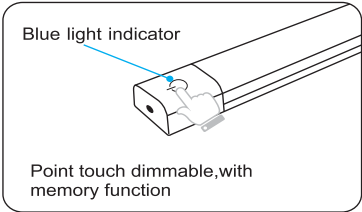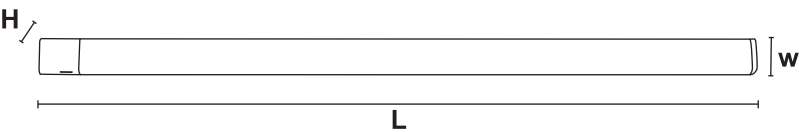


IP20 DUST PROOF	Seamless connection Fashion design		3000 K 4000 K 6500 K			
Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-LS26-300-3.5W-Point Touch	DC12V	>0.9	3.5W	350lm	120°	300*25*13.5mm
LED-LS26-500-7W-Point Touch	DC12V	>0.9	7W	710lm	120°	300*25*13.5mm
LED-LS26-300-3.5W-IR sensor	DC12V	>0.9	3.5W	350lm	120°	300*25*13.5mm
LED-LS26-500-7W-IR sensor	DC12V	>0.9	7W	710lm	120°	300*25*13.5mm

Led Cabinet Light

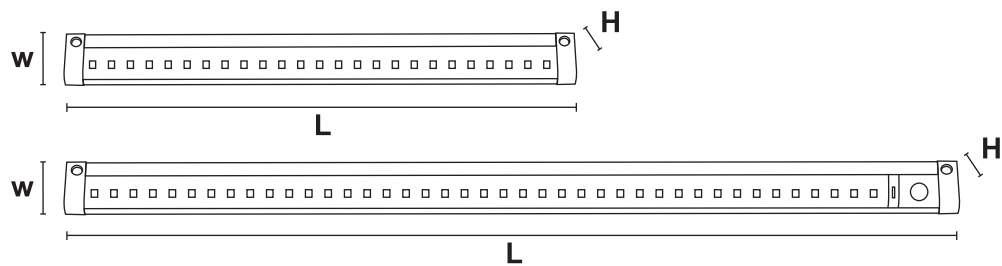

Features

Installation accessories

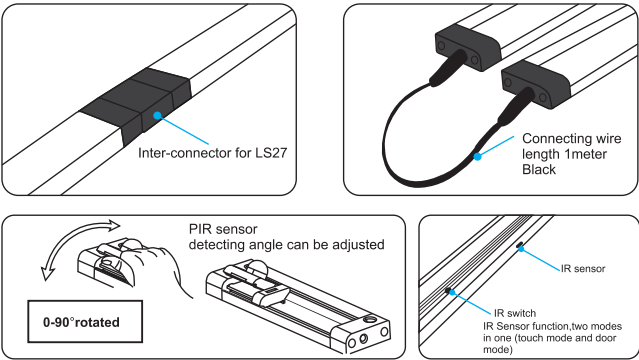

IP20 DUST PROOF	Seamless connection		3000 K 4000 K 6500 K			
Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-LS27-300-IR	DC12V	>0.9	3.5W	350lm	120°	300*28.6*9.6mm
LED-LS27-500-IR	DC12V	>0.9	5.5W	550lm	120°	500*28.6*9.6mm
LED-LS27-1000-IR	DC12V	>0.9	10.5W	1050lm	120°	1000*28.6*9.6mm
LED-LS27-300-PIR	DC12V	>0.9	3.5W	350lm	120°	300*28.6*9.6mm
LED-LS27-500-PIR	DC12V	>0.9	5.5W	550lm	120°	500*28.6*9.6mm
LED-LS27-1000-PIR	DC12V	>0.9	10.5W	1050lm	120°	1000*28.6*9.6mm



LED MIRROR LIGHT



Professional LED
lighting supplier

Perfect Replacement

Led Mirror Light

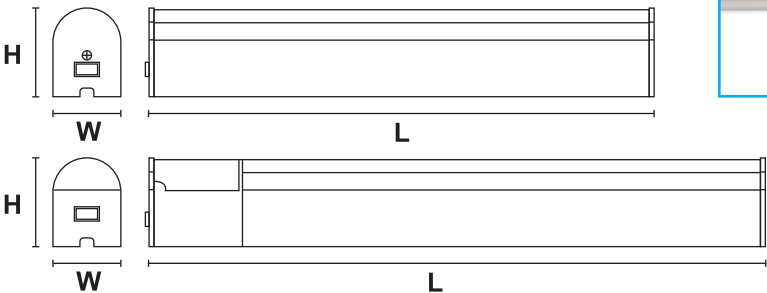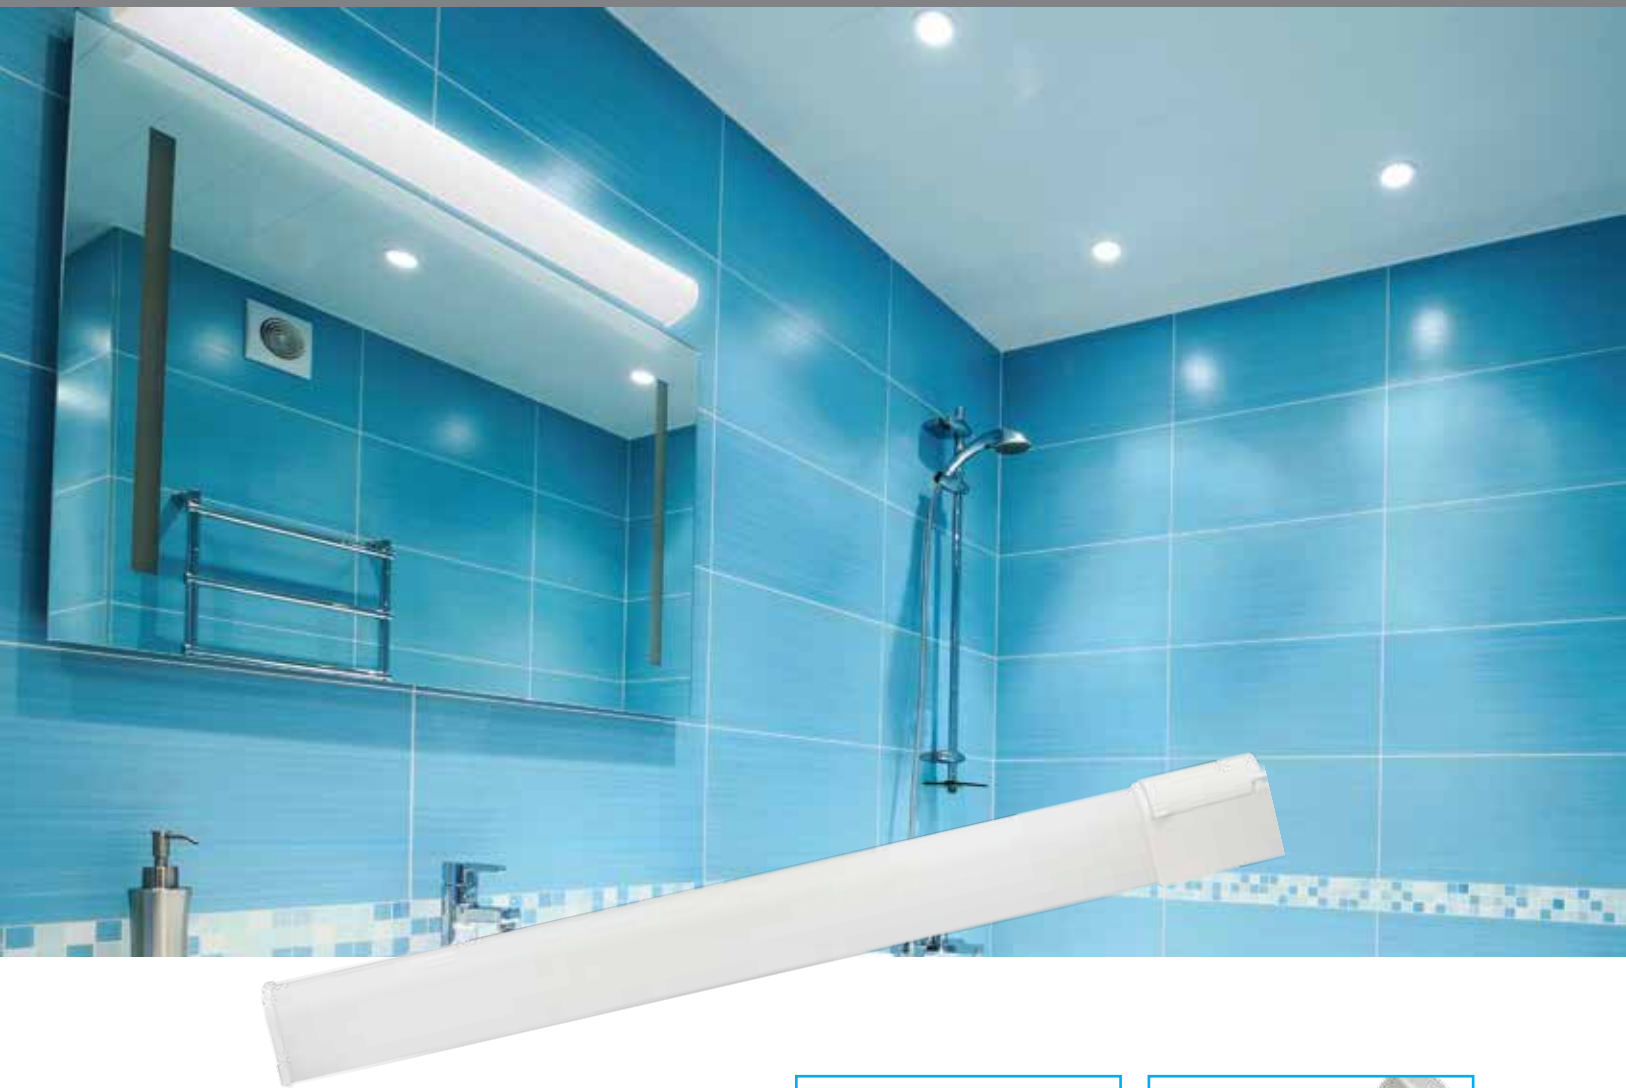


Installation accessories




IP44 WATER PROOF

Surface emitting light with gentle beam
Easy installation



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-Mirror Lamp-600-15	AC 100~277 V	>0.9	15W	1510lm	120°	600*53*65mm
LED-Mirror Lamp-900-20	AC 100~277 V	>0.9	20W	2100lm	120°	900*53*65mm
LED-Mirror Lamp-682-15	AC 100~277 V	>0.9	15W	1510lm	120°	682*53*65mm
LED-Mirror Lamp-982-20	AC 100~277 V	>0.9	20W	2100lm	120°	982*53*65mm

Led Mirror Light

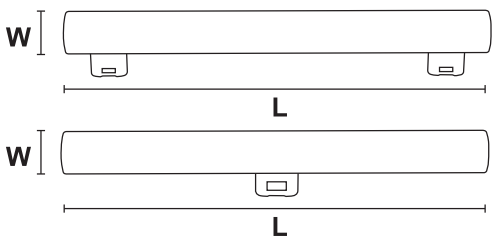

Base



IP42

WATER PROOF

Prefect replacement

2700 K

5000 K

Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L*W)
LED-T30/300-S14s-5	AC 100~277 V	>0.9	5W	510lm	270°	300*30mm
LED-T30/500-S14s-7	AC 100~277 V	>0.9	7W	710lm	270°	500*30mm
LED-T30/1000-S14s-14	AC 100~277 V	>0.9	14W	1440lm	270°	1000*30mm
LED-T30/300-S14d-5	AC 100~277 V	>0.9	5W	510lm	270°	300*30mm
LED-T30/500-S14d-7	AC 100~277 V	>0.9	7W	710lm	270°	500*30mm
LED-T30/1000-S14d-14	AC 100~277 V	>0.9	14W	1440lm	270°	1000*30mm


LED GARDEN LIGHT



Professional LED
lighting supplier

Artistic desing

Led Garden Light

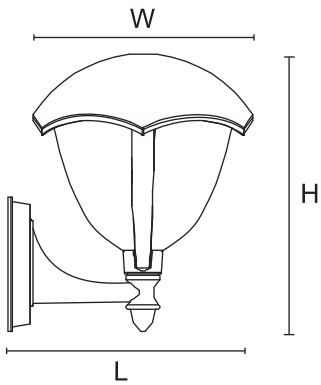

Installation accessories



AVAILABLE COLOR OF HOUSING



IP54 CORROSION PROOF

Anti-glare PC diffuser / Aluminum housing / Powder painting

Item NO.	Input	Wattage	Dimension(L*W*H)
36071-E27	AC 100~277 V	MAX 40W	210*188*238mm

Led Garden Light



AVAILABLE COLOR OF HOUSING



Installation accessories



IP54 CORROSION PROOF

Anti-glare PC diffuser / Aluminum housing
Powder painting


3000 K 4000 K 6500 K

Item NO.	Input	PF	Wattage	Lumen	Dimension(L*W*H)
19162	AC 100~277 V	>0.9	7W	710lm	230*180*120mm
19165	AC 100~277 V	>0.9	7W	710lm	180*180*120mm
19168	AC 100~277 V	>0.9	21W	2100lm	

Led Wall Light



AVAILABLE COLOR OF HOUSING

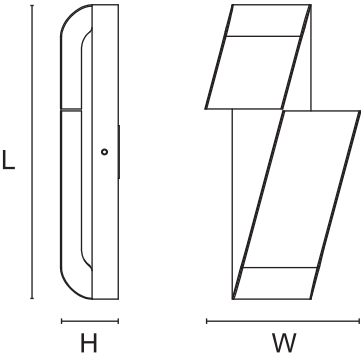

Installation accessories



IP54 CORROSION PROOF

Anti-glare PC diffuser
Aluminum housing
Powder painting



3000 K 4000 K 6500 K

Item NO.	Input	PF	Wattage	Lumen	Dimension(L*W*H)
14221	AC 100~277 V	>0.9	7W	710lm	280*150*56mm

Led Wall Light



AVAILABLE COLOR OF HOUSING

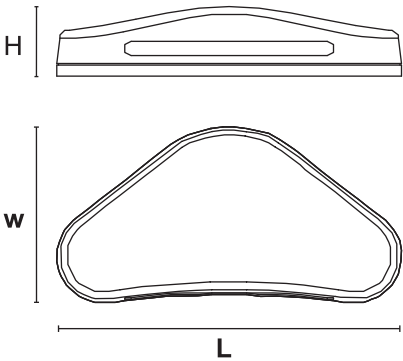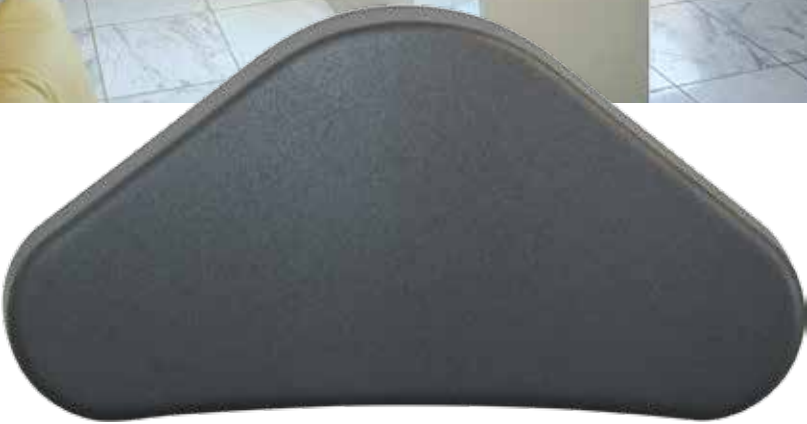

Installation accessories



IP54 CORROSION PROOF

Anti-glare PC diffuser
Aluminum housing
Powder painting


3000 K 4000 K 6500 K

Item NO.	Input	PF	Wattage	Lumen	Dimension(L*W*H)
14231	AC 100~277 V	>0.9	7W	710lm	200*103*40mm

Led Wall Light



AVAILABLE COLOR OF HOUSING

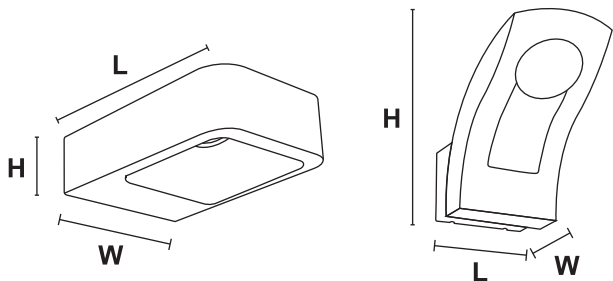

Installation accessories



IP54 CORROSION PROOF

IK10 ANTI-IMPACT

Die-casting Aluminum housing


3000 K 4000 K 6500 K

Item NO.	Input	PF	Wattage	Lumen	Dimension(L*W*H)
LED-WALL-A	AC 100~277 V	>0.9	6W	630lm	180*120*50mm
LED-WALL-B	AC 100~277 V	>0.9	6W	630lm	164*100*195mm

Led Garden Light



AVAILABLE COLOR OF HOUSING

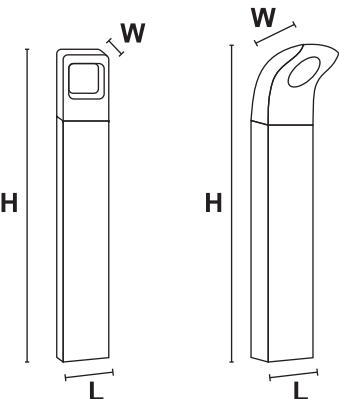

A

B

Installation accessories




IP54

CORROSION PROOF

IK10


ANTI-IMPACT

Die-casting Aluminum housing



Item NO.	Input	PF	Wattage	Lumen	Dimension(L*W*H)
LED-GARDEN-A-0.8m	AC 100~277 V	>0.9	6W	630lm	120*50*800mm
LED-GARDEN-B-0.8m	AC 100~277 V	>0.9	6W	630lm	165*100*800mm

Led Door Light

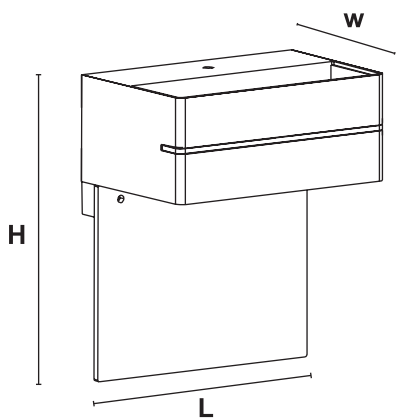

Installation accessories



IP54 CORROSION PROOF

Die-casting Aluminum housing
DIY door labels

3000 K 4000 K 6500 K

Item NO.	Input	PF	Wattage	Lumen	Dimension(L*W*H)
LED-DOOR-6	AC 100~277 V	>0.9	6W	630lm	155*65*102mm




LED EMERGENCY LIGHT



Professional LED
lighting supplier

For Safety

Led Emergency Light

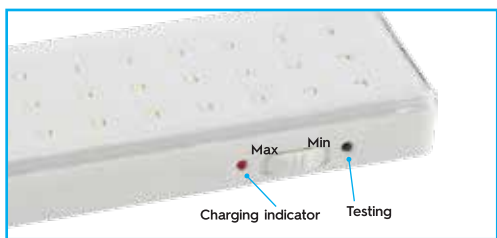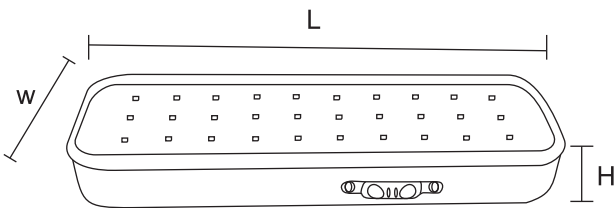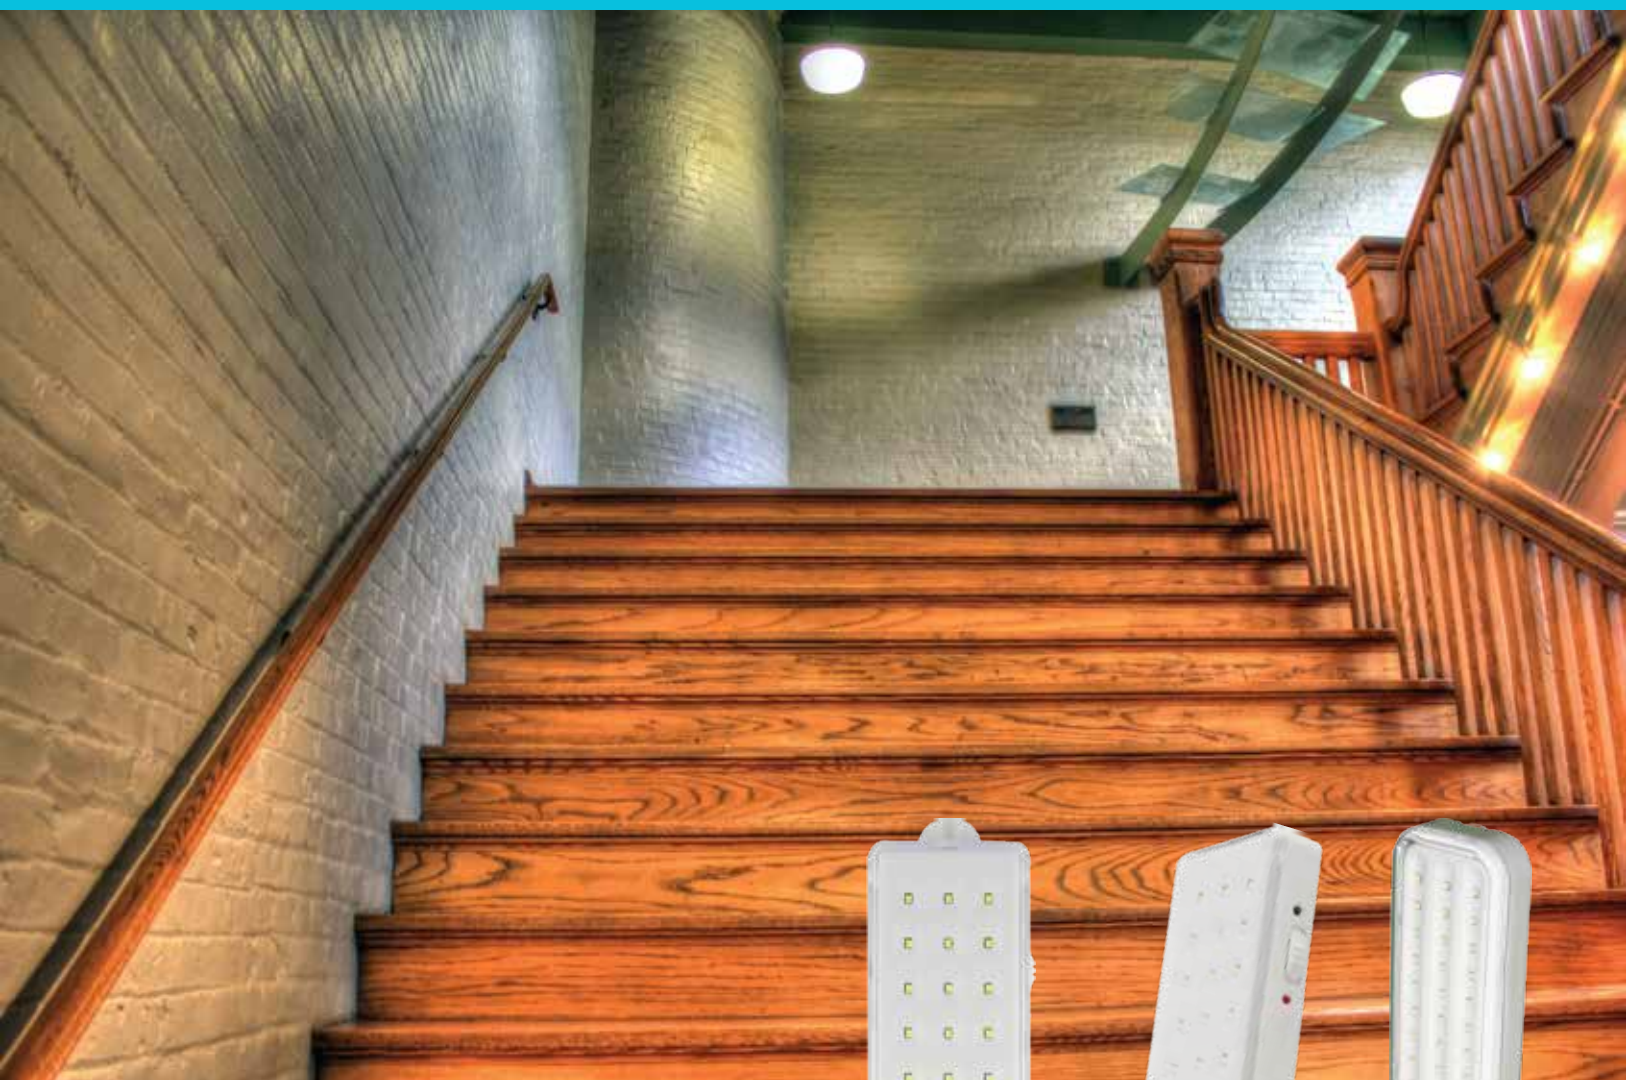

Installation accessories



IP20 DUST PROOF

Recharging time: 24h
1*3.7V 2.0Ah Lithium Battery

30 LEDs
operating time at Max power: 7h
operating time at Min power: 10h

60 LEDs
operating time at Max power: 6h
operating time at Min power: 8h

3000 K 4000 K 6500 K

Item NO.	Input	LED QTY	Wattage	Lumen	Beam Angle	Dimension(L*W*H)
LED-EME-2	AC 100~277 V	30	2W	90lm/Min 220lm/Max	140°	255*73*30mm
LED-EME-4	AC 100~277 V	60	4W	180lm/Min 410lm/Max	140°	330*73*30mm

Available wiht AC/DC version, constant lighting

LED TABLE LAMP



Professional LED
lighting supplier

Your Accompany

Led Table Lamp




AVAILABLE COLOR OF HOUSING




IP20 DUST PROOF

ABS+silicone tube
Touch dimmable
Three dim level : 10%, 50%, 100%



Item NO.	Input	PF	Wattage	Lumen
LED-Table Lamp-CQ109	AC 100~277 V	>0.9	10W	1100lm

Led Table Lamp

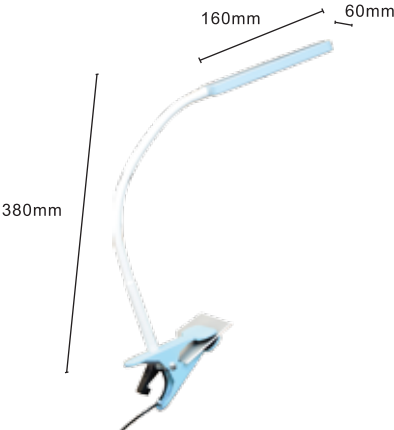


AVAILABLE COLOR OF HOUSING



IP20 DUST PROOF

ABS+silicone tube



Item NO.	Input	PF	Wattage	Lumen
LED-Table Lamp-CQ110	AC 100~277 V or USB 5v/1A	>0.9	4W	420lm

Led Table Lamp



IP20 DUST PROOF

ABS+aluminium alloy
Color changeable, touch dimmable
Five dim level: 10%,30%,50%,70%,90%
With 1.5 m adaptor and 1.5 m USB connect line



Item NO.	Input	PF	Wattage	Lumen
LED-Table Lamp-CQ117	AC 100~277 V or USB 5v/1A	>0.9	6.5W	650lm


Led Table Lamp



ABS+Aluminium alloy
Touch dimmable
Three dim level : 10%, 50%, 100%
With 1.5m adaptor an 1.5m USB connect line



LED-Table Lamp-CQ118	6.5W	650lm	120°
----------------------	------	-------	------

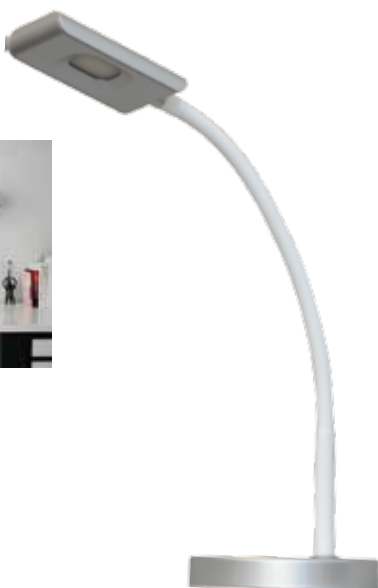

ABS+Silicone alloy
Touch dimmable
Three dim level : 10%, 50%, 100%
With 1.5m adaptor an 1.5m USB connect line



LED-Table Lamp-CQ126	4W	420lm	120°
----------------------	----	-------	------



ABS+Silicone alloy
Not include light bulb
e27 max 45W



LED-Table Lamp-CQ119	MAX 45W
----------------------	---------



ABS+Silicone alloy
Touch dimmable
Three dim level : 10%, 50%, 100%
With 1.5m adaptor an 1.5m USB connect line



LED-Table Lamp-CQ123	6W	650lm	120°
----------------------	----	-------	------


FILAMENT LIGHT BULB



Professional LED
lighting supplier

Decorative


Filament Light Bulb

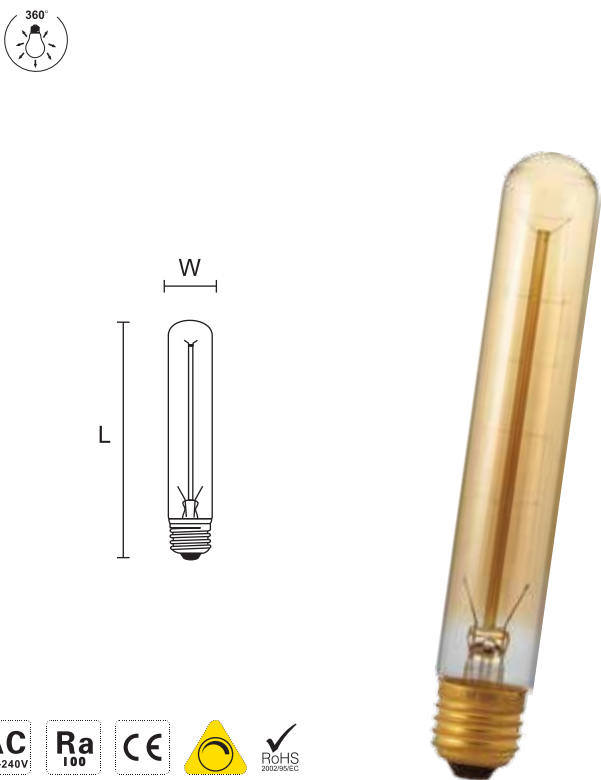

GLS-DF-G95-40 E27 40W 140lm 360° 95*140mm

GLS-DF-G125-40 E27 40W 140lm 360° 125*172mm

GLS-DF-T28-40 E27 40W 140lm 360° 28*185mm

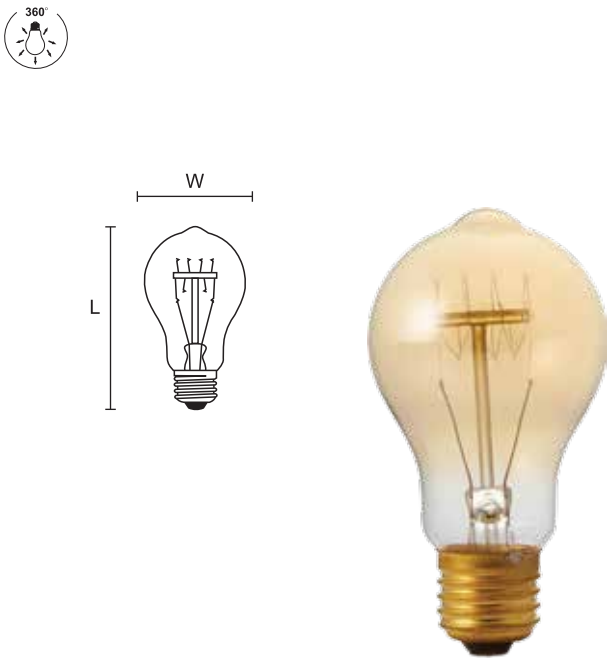

GLS-DF-ST64-40 E27 40W 140lm 360° 64*140mm

GLS-DF-A60-40 E27 40W 140lm 360° 60*112mm


LED FILAMENT LIGHT BULB



Professional LED
lighting supplier

High lumen efficacy

Led Filament Light Bulb

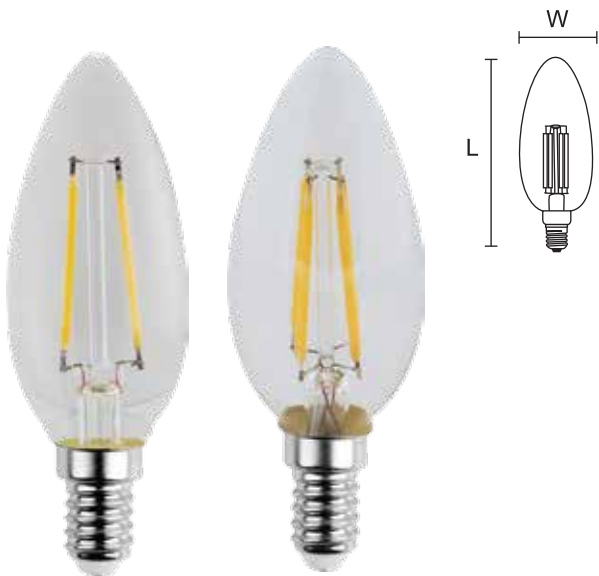

LED-B2-C35 E14 2W 200lm 360° 35*98mm

LED-B2-C35 E14 4W 380lm 360° 35*98mm



LED-B2-C35T E14 2W 200lm 360° 35*98mm

LED-B2-C35T E14 4W 380lm 360° 35*98mm



LED-B2-CA35 E14 2W 200lm 360° 35*118mm


LED-B2-CA35 E14 4W 380lm 360° 35*118mm




LED-B2-G45-2 E14/E27 2W 200lm 360° 45*78mm

LED-B2-G45-4 E14/E27 4W 380lm 360° 45*78mm


Led Filament Light Bulb




LED-B2-A60-4	E27	4W	400lm	360°	60*102mm
LED-B2-A60-6	E27	6W	660lm	360°	60*102mm
LED-B2-A60-7	E27	7W	800lm	360°	60*102mm



LED-B2-G80-4	E27	4W	420lm	360°	80*112mm
LED-B2-G80-6	E27	6W	660lm	360°	80*112mm
LED-B2-G80-7	E27	7W	800lm	360°	80*112mm



LED-B2-G95-4	E27	4W	420lm	360°	95*132mm
LED-B2-G95-6	E27	6W	660lm	360°	95*132mm
LED-B2-G95-7	E27	7W	800lm	360°	95*132mm
LED-B2-G95-8	E27	8W	1000lm	360°	95*132mm



LED-B2-G120-4	E27	4W	420lm	360°	120*175mm
LED-B2-G120-6	E27	6W	660lm	360°	120*175mm
LED-B2-G120-7	E27	7W	800lm	360°	120*175mm
LED-B2-G120-8	E27	8W	1000lm	360°	120*175mm


LED BULB




Professional LED
lighting supplier

Perfect Replacement


Led Bulb




LED-B5-C37-5	E14	5W	400lm	200°	37*103mm
LED-B5-C37-6	E14	6W	470lm	200°	37*103mm





LED-B5-G45-5	E14/27	5W	400lm	200°	45*74/80mm
LED-B5-G45-6	E14/27	6W	470lm	200°	45*74/80mm



LED-B5-A60-10	E27	10W	806lm	240°	60*118mm
LED-B5-A70-15	E27	15W	1350lm	240°	70*134mm





LED-B5-G95-12	E27	12W	1000lm	270°	95*130mm
---------------	-----	-----	--------	------	----------




LED-GX53-D-8	GX53	  	8W	640lm	160°	75*28mm
LED-GX53-D-10	GX53	  	10W	800lm	160°	75*28mm



LED-GX53-luna-4	GX53	  	4W	320lm	160°	75*28mm
LED-GX53-luna-6	GX53	  	6W	500lm	160°	75*28mm
LED-GX53-luna-8	GX53	  	8W	640lm	160°	75*28mm
LED-GX53-luna-10	GX53	  	10W	800lm	160°	75*28mm




LED-B1-G95-15	E27	  	15W	1350lm	270°	95*135mm
LED-B1-G120-18	E27	  	18W	1800lm	270°	120*155mm




LED-B1-AR111-15	G53	  	15W	900lm	24°/36°	111*70mm
LED-B1-AR111-15	GU10	  	15W	950lm	24°/36°	111*70mm


Led Bulb





LED-B1-GU10	GU10	  	3W	250lm	120°	50*55mm
LED-B1-GU10	GU10	  	5W	400lm	120°	50*55mm
LED-B1-GU10	GU10	  	6W	470lm	120°	50*55mm

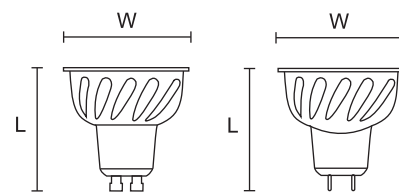



LED-B1-MR16-COB	GU5.3	  	5W	380lm	38°	50*54mm
LED-B1-MR16-SMD	GU5.3	  	5W	380lm	120°	50*54mm
LED-B1-GU10-COB	GU10	  	5W	380lm	38°	50*54mm
LED-B1-GU10-SMD	GU10	  	5W	380lm	120°	50*54mm




LED-B1-R39-3	E14	  	3W	250lm	110°	39*70mm
LED-B1-R50-5	E14	  	5W	400lm	110°	50*87mm



LED-B1-R63-8	E27	  	8W	660lm	110°	63*103mm
LED-B1-R80-12	E27	  	12W	1000lm	110°	80*125mm

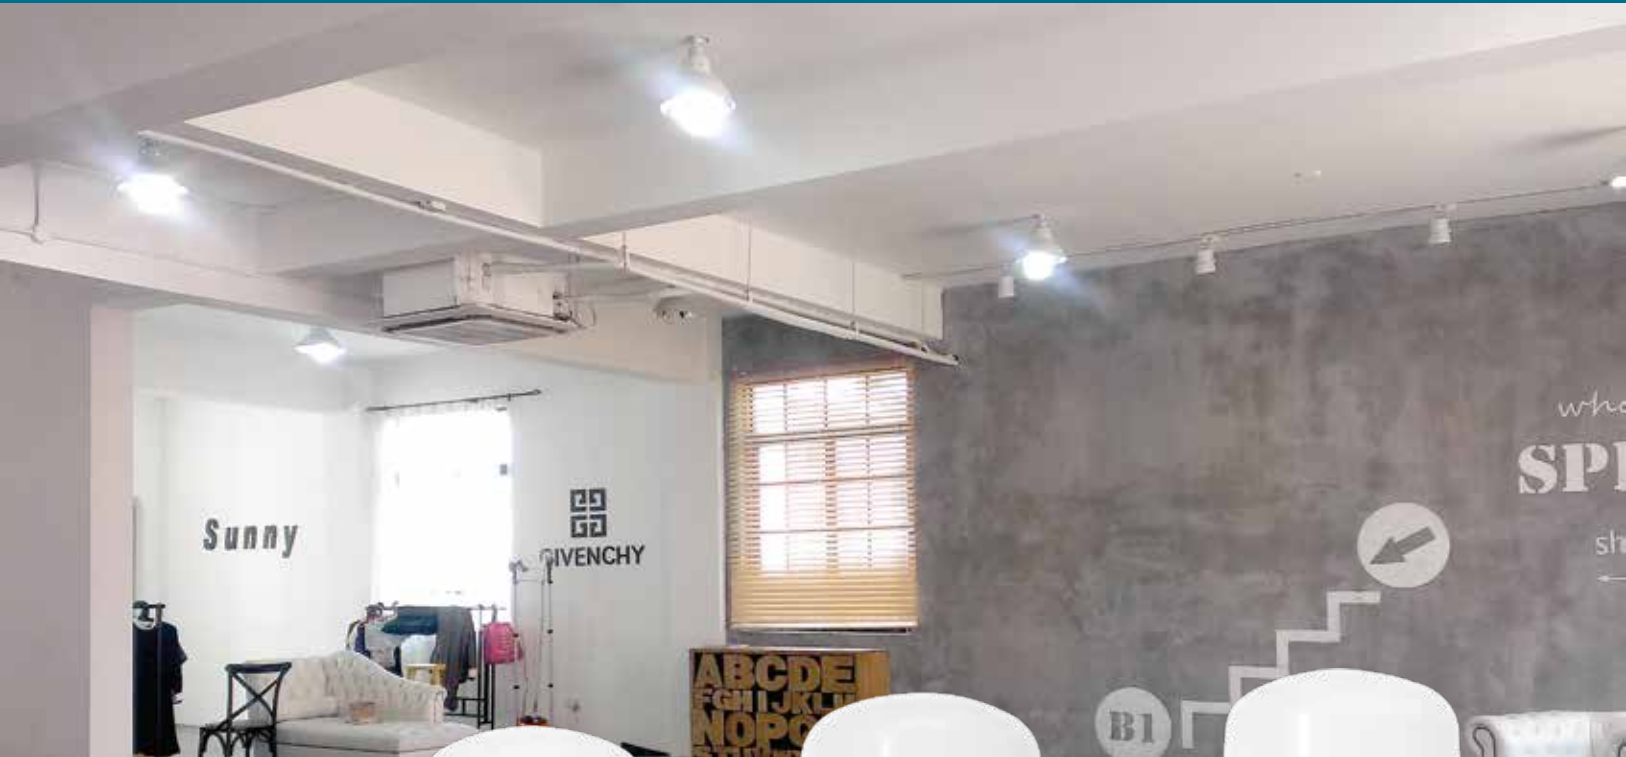


20W ≈ 35W
30W ≈ 45W
40W ≈ 65W
50W ≈ 80W

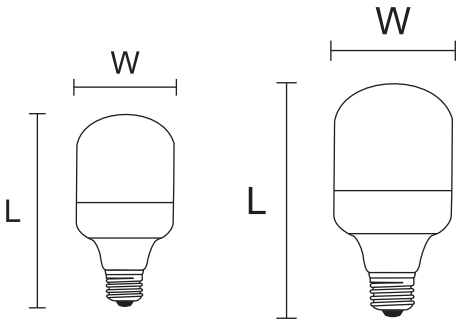


IP44 WATER PROOF

Save energy
high lumen efficacy, 90lm/w
Ideal replacement of high wattage CFL



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(W*L)
LED-B1-HW-20	AC 100~277 V	>0.9	20W	2000lm	200°	80*150mm
LED-B1-HW-30	AC 100~277 V	>0.9	30W	3100lm	200°	100*185mm
LED-B1-HW-40	AC 100~277 V	>0.9	40W	4150lm	200°	120*215mm
LED-B1-HW-50	AC 100~277 V	>0.9	50W	5000lm	200°	120*225mm

Led Bulb

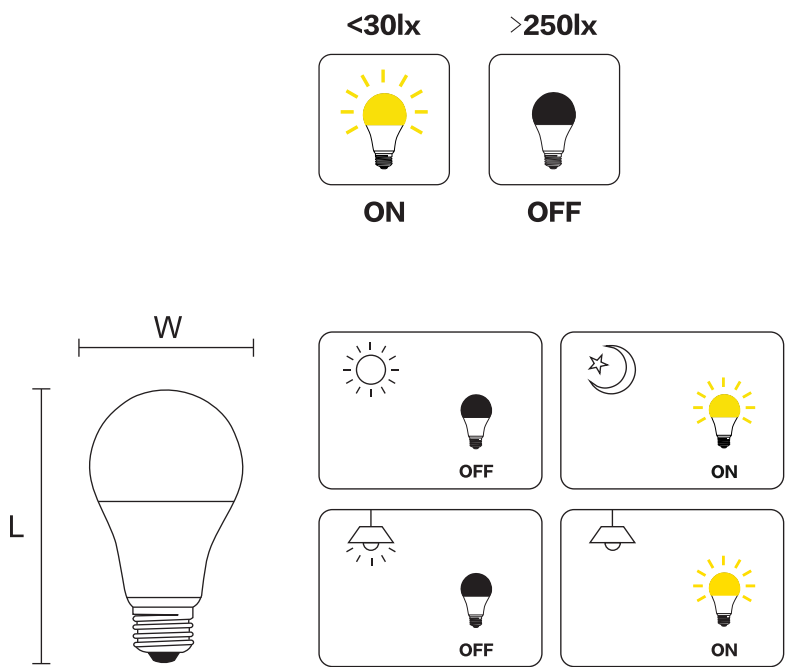

IP20 DUST PROOF		Light Sensor, work automatically			3000 K 4000 K 6500 K	
Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(W*L)
LED-Sensor-A60-6.5	AC 100~277 V	>0.9	6.5W	660lm	200°	60*115mm
LED-Sensor-A60-9.5	AC 100~277 V	>0.9	9.5W	980lm	200°	60*115mm

POULTRY LED TUBE



Professional LED
lighting supplier

For Poultry

Poultry Led Tube




UP TO
%70
ENERGY
SAVING

Energy
A+
3 Year
Guarantee



RoHS
COMPLIANT
IP 67



IP67 WATER
PROOF

Dimmable
Solid Polycarbonate Body
Washable

E27



Item NO.	Input	PF	Wattage	Lumen	Beam Angle	Dimension(L)
LED-POU-TU-9W	DC 48 V	>0.9	9W	1100lm	120°-160°	1000 mm
LED-POU-TU-5W	DC 48 V	>0.9	5W	650lm	120°-160°	500 mm



